



# Dezli

Where Engineering and Art Meet


# Low Glare



# Adjustable



# One Concept, Several Forms

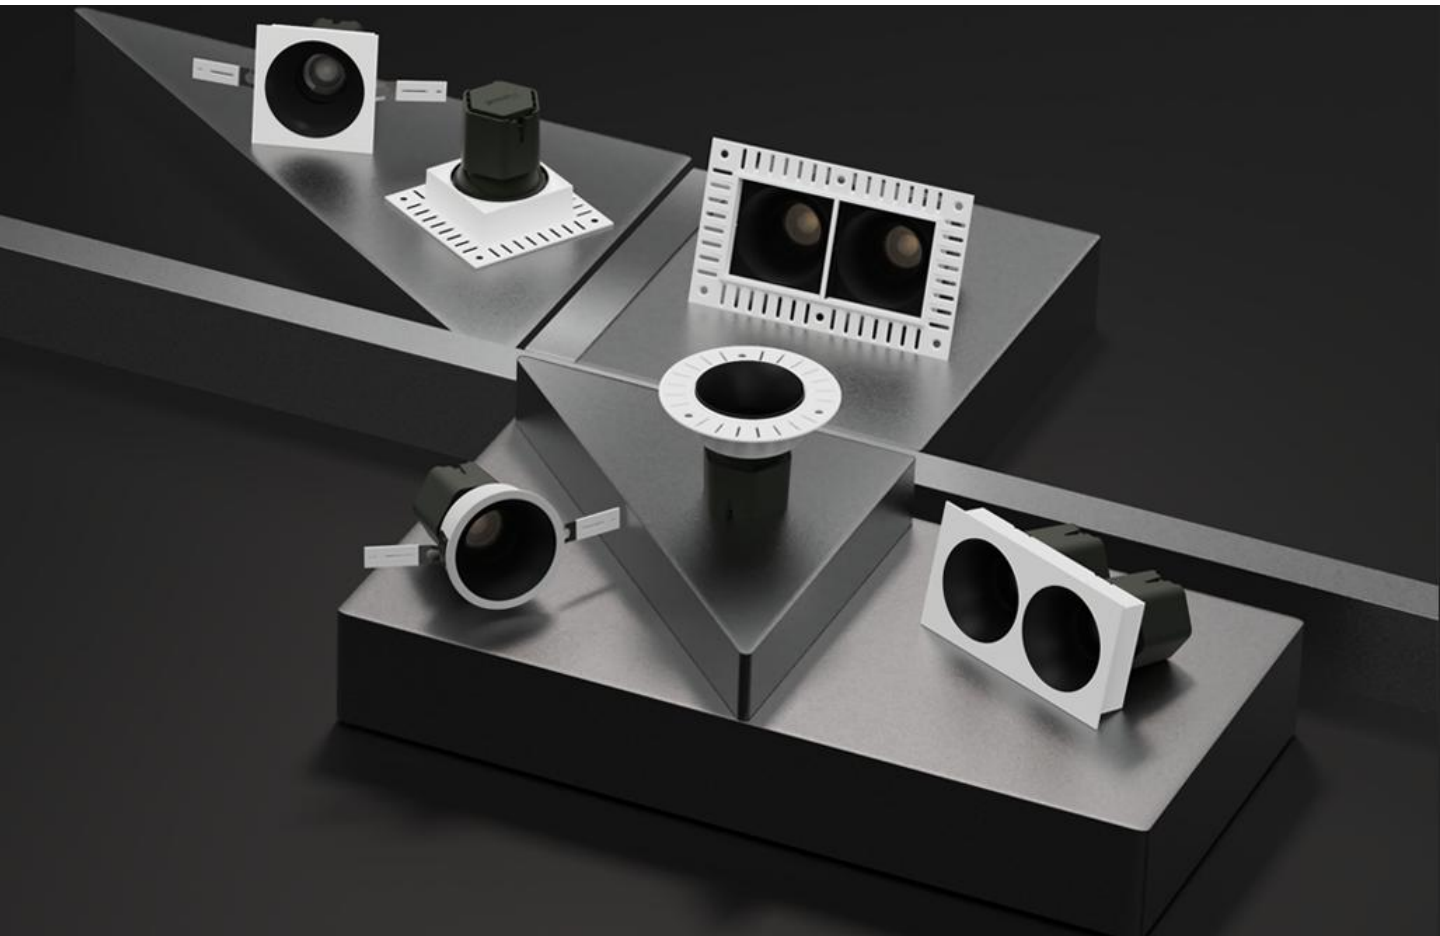

**Engineered to cool,  
Designed to impress**



**Light  
Engine**

# Dezli C Mini

Ceiling Recessed

F261



## Key Features

- IP 65
- Adjustable
- Low Glare (UGR <10)

## Technical Data

|                       |              |
|-----------------------|--------------|
| CODE                  | F261         |
| Light source          | LED          |
| Power (W)             | 12W          |
| luminous flux (lm)    | 950          |
| Color Rendering (Ra)  | >98          |
| Color Temperature (K) | 3000   4000* |



Spot (S)



Medium (M)

\*Customized body colors and other color temperatures (CCTs) are available upon request

## Mechanical Data


|                    |                                    |
|--------------------|------------------------------------|
| Material           | ADC12 Die-Casting                  |
| Body Color         | Alu                                |
| Body Cover         | White   Black                      |
| Light Distribution | Electrostatic Paint<br>Symmetrical |



75mm

## Electrical Data

|                    |                   |
|--------------------|-------------------|
| Supply Voltage     | 220-240 Vac, 50Hz |
| Output Current     | 350mA             |
| Input Current      | 0.03A             |
| Input Power        | 13W               |
| Output Power Range | 2-36 W            |
| PF                 | 0.92              |
| Efficiency         | 78%               |
| Output Voltage     | 25-42V            |
| No load Voltage    | 55V               |

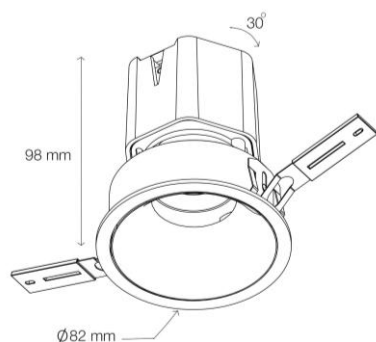

# Dezli C Mini TR

Ceiling Recessed

F262



## Key Features

- IP 65
- Adjustable
- Low Glare (UGR <10)

## Technical Data

|                       |              |
|-----------------------|--------------|
| CODE                  | F262         |
| Light source          | LED          |
| Power (W)             | 12W          |
| luminous flux (lm)    | 950          |
| Color Rendering (Ra)  | >98          |
| Color Temperature (K) | 3000   4000* |



Spot (S)



Medium (M)

\*Customized body colors and other color temperatures (CCTs) are available upon request


## Mechanical Data

|                    |                                    |
|--------------------|------------------------------------|
| Material           | ADC12 Die-Casting                  |
| Body Color         | Alu                                |
| Body Cover         | White   Black                      |
| Light Distribution | Electrostatic Paint<br>Symmetrical |

75mm

## Electrical Data

|                    |                   |
|--------------------|-------------------|
| Supply Voltage     | 220-240 Vac, 50Hz |
| Output Current     | 350mA             |
| Input Current      | 0.05A             |
| Input Power        | 16W               |
| Output Power Range | 2-36 W            |
| PF                 | 0.92              |
| Efficiency         | 78%               |
| Output Voltage     | 25-42V            |
| No load Voltage    | 55V               |



# Dezli Q Mini

Ceiling Recessed

F263



## Key Features

- IP 65
- Adjustable
- Low Glare (UGR <10)

## Technical Data

|                       |              |
|-----------------------|--------------|
| CODE                  | F263         |
| Light source          | LED          |
| Power (W)             | 12W          |
| luminous flux (lm)    | 950          |
| Color Rendering (Ra)  | >98          |
| Color Temperature (K) | 3000   4000* |



Spot (S)



Medium (M)

\*Customized body colors and other color temperatures (CCTs) are available upon request



## Mechanical Data

|                    |                                    |
|--------------------|------------------------------------|
| Material           | ADC12 Die-Casting                  |
| Body Color         | Alu                                |
| Body Cover         | White   Black                      |
| Light Distribution | Electrostatic Paint<br>Symmetrical |

 75\*75mm

## Electrical Data

|                    |                   |
|--------------------|-------------------|
| Supply Voltage     | 220-240 Vac, 50Hz |
| Output Current     | 350mA             |
| Input Current      | 0.05A             |
| Input Power        | 16W               |
| Output Power Range | 2-36 W            |
| PF                 | 0.92              |
| Efficiency         | 78%               |
| Output Voltage     | 25-42V            |
| No load Voltage    | 55V               |

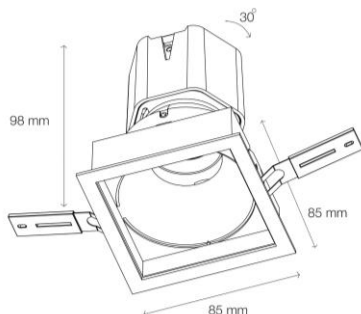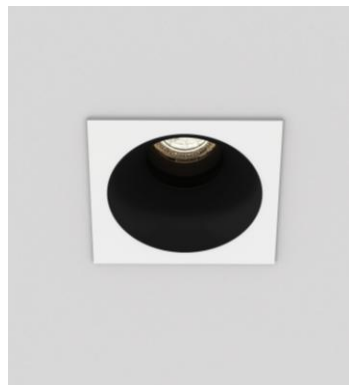

# Dezli Q Mini TR

Ceiling Recessed

F264



## Key Features

- IP 65
- Adjustable
- Low Glare (UGR <10)

## Technical Data

|                       |              |
|-----------------------|--------------|
| CODE                  | F264         |
| Light source          | LED          |
| Power (W)             | 12W          |
| luminous flux (lm)    | 950          |
| Color Rendering (Ra)  | >98          |
| Color Temperature (K) | 3000   4000* |



Spot (S)



Medium (M)

\*Customized body colors and other color temperatures (CCTs) are available upon request


## Mechanical Data

|                    |                                    |
|--------------------|------------------------------------|
| Material           | ADC12 Die-Casting                  |
| Body Color         | Alu                                |
| Body Cover         | White   Black                      |
| Light Distribution | Electrostatic Paint<br>Symmetrical |

 75\*75mm

## Electrical Data

|                    |                   |
|--------------------|-------------------|
| Supply Voltage     | 220-240 Vac, 50Hz |
| Output Current     | 350mA             |
| Input Current      | 0.05A             |
| Input Power        | 16W               |
| Output Power Range | 2-36 W            |
| PF                 | 0.92              |
| Efficiency         | 78%               |
| Output Voltage     | 25-42V            |
| No load Voltage    | 55V               |

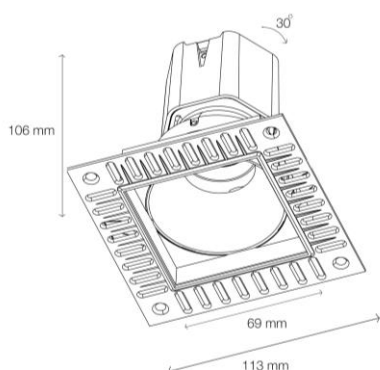



# Dezli Q Mini Twin

Ceiling Recessed

F265



## Key Features

- IP 65
- Adjustable
- Low Glare (UGR <10)

## Technical Data

|                       |              |
|-----------------------|--------------|
| CODE                  | F265         |
| Light source          | LED          |
| Power (W)             | 2X12W        |
| luminous flux (lm)    | 1900         |
| Color Rendering (Ra)  | >98          |
| Color Temperature (K) | 3000   4000* |



Spot (S)



Medium (M)

\*Customized body colors and other color temperatures (CCTs) are available upon request


## Mechanical Data

|                    |                                    |
|--------------------|------------------------------------|
| Material           | ADC12 Die-Casting                  |
| Body Color         | Alu                                |
| Body Cover         | White   Black                      |
| Light Distribution | Electrostatic Paint<br>Symmetrical |

150\*75mm

## Electrical Data

|                    |                   |
|--------------------|-------------------|
| Supply Voltage     | 220-240 Vac, 50Hz |
| Output Current     | 700 mA            |
| Input Current      | 0.12 A            |
| Input Power        | 32 W              |
| Output Power Range | 2-36 W            |
| PF                 | 0.92              |
| Efficiency         | 78%               |
| Output Voltage     | 25-42V            |
| No load Voltage    | 55V               |

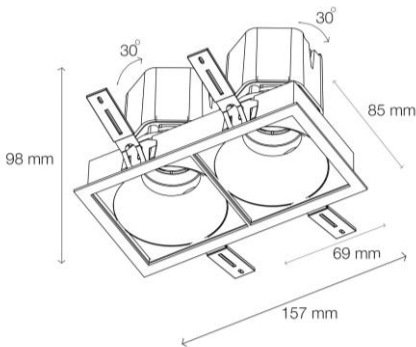

# Dezli Q Mini Twin TR

Ceiling Recessed Trimless

F266



## Key Features

- Seamless Trimless
- Adjustable
- Low Glare (UGR <10)

## Technical Data

|                       |              |
|-----------------------|--------------|
| CODE                  | F266         |
| Light source          | LED          |
| Power (W)             | 2X12W        |
| luminous flux (lm)    | 1900         |
| Color Rendering (Ra)  | >98          |
| Color Temperature (K) | 3000   4000* |



Spot (S)



Medium (M)

\*Customized body colors and other color temperatures (CCTs) are available upon request


## Mechanical Data

|                    |                                    |
|--------------------|------------------------------------|
| Material           | ADC12 Die-Casting                  |
| Body Color         | Alu                                |
| Body Cover         | White   Black                      |
| Light Distribution | Electrostatic Paint<br>Symmetrical |

150\*75mm

## Electrical Data

|                    |                   |
|--------------------|-------------------|
| Supply Voltage     | 220-240 Vac, 50Hz |
| Output Current     | 700 mA            |
| Input Current      | 0.12 A            |
| Input Power        | 32 W              |
| Output Power Range | 2-36 W            |
| PF                 | 0.92              |
| Efficiency         | 78%               |
| Output Voltage     | 25-42V            |
| No load Voltage    | 55V               |

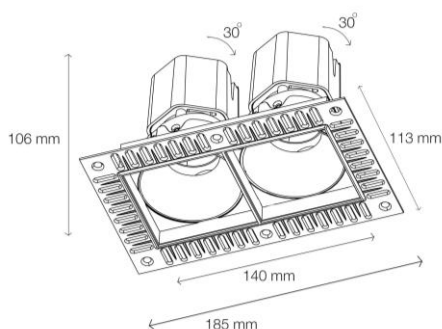



D e z i



**Fenos**  
Light to Delight