


Bendan Mini

Ceiling Recessed

F252



0~30°

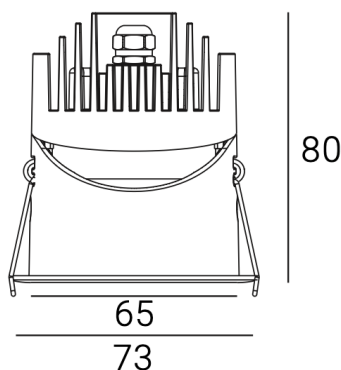

Key Features

- IP 65
- Adjustable
- Low Glare (UGR <10)

Technical Data

CODE	F252
Light source	LED
Power (W)	12W
luminous flux (lm)	1100
Color Rendering (Ra)	>90
Color Temperature (K)	2700 3000 4000*

*Customized body colors and other color temperatures (CCTs) are available upon request



Spot (S)



Spot-Medium (SM)



Medium (M)



Wide (W)

Mechanical Data

Material	ADC12 Die-Casting
Body Color	White Black
Body Cover	Electrostatic Paint
Light Distribution	15° / 24° / 36° / 50° /

65mm

Electrical Data

Supply Voltage	220-240 Vac, 50Hz
Output Current	350mA
Input Current	0.05A
Input Power	2W
Output Power Range	2-36 W
PF	0.92
Efficiency	78%
Output Voltage	25-42V
No load Voltage	55V

