



Filde Micro

Ceiling Recessed




Filde Micro

Ceiling Recessed

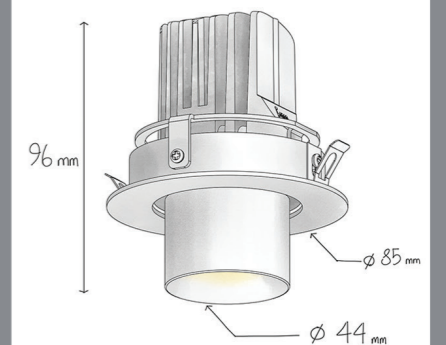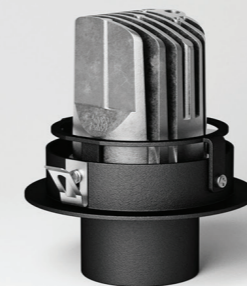

CODE	F123
Light source	LED
Power (W)	9
luminous flux (lm)	990
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black*

IP 20  75 mm   

 0.32 kg

 17 x 13 x 9 cm

Supply Voltage:
220-240 Vac, 50Hz

Driver:
DALI | Dimmable version available upon request

Recommended Applications:
Residential | Office | Shop

*Customized body colors and other color temperatures (CCTs) are available upon request


Filde Micro is a minimal adjustable downlight with different light distributions from spot to wide.



Kafi Abadi Residential / Architect: Bonsar Office 2019

Filde Micro

Light distributions

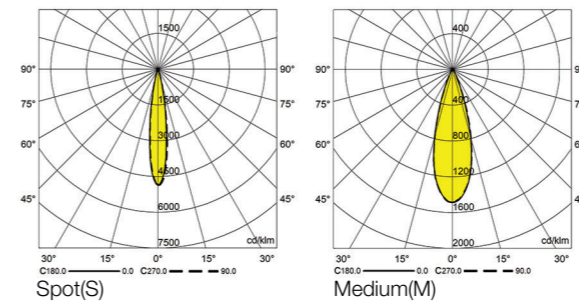

Order code table

Body Color	3000K	Beam Angle	4000K	Body Color
White	F123W930S	Spot	F123W940S	White
	F123W930M	Medium	F123W940M	

Body Color	3000K	Beam Angle	4000K	Body Color
Black	F123B930S	Spot	F123B940S	Black
	F123B930M	Medium	F123B940M	