


www.fenos.be

All information in this catalogue is provided for information purposes only and Fenos makes no representations about the accuracy or completeness of the information in this catalogue. Fenos may revise the information and technical data contain hereinat any time without notice.

Weststraat 129e 9940, Evergem, Belgium

+32 (0) 9 335 81 49 VAT: BE0671.501.997

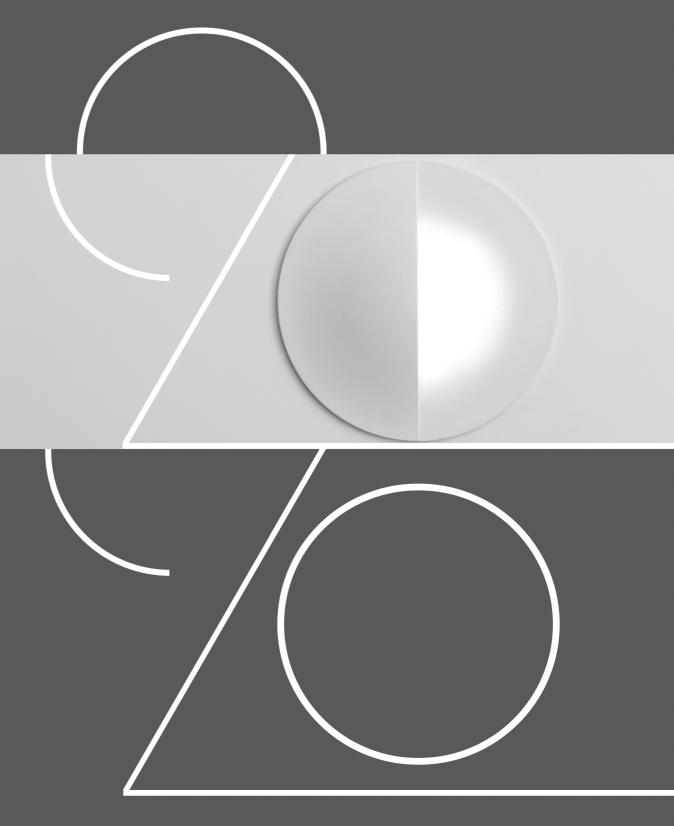





TECHNICAL COMPETENCE

Focus On Light Distribution
In a professional lighting design project, light source

In a professional lighting design project, light sources with several light distributions maybe required. Using special optics of the latest technology makes Fenos products suitable for a wide range of applications:

From uniform wallwashing for vertical illumination to narrow beam spots to create shadows and enhance modelling effect, low glare optics for office applications or oval distributions for corridors.










Thermal Design

All Fenos products are equipped with LED light sources. For LEDs, proper heat dissipation is a key element to ensure the quality and life time of the product. During the design process, a lot of attention is paid to in order to ensure maximum heat transfer and in the production line, quality control department makes regular checks and measurements with high accuracy thermometer to check the performance of heatsink and ensure that the temperature on LED is far below the allowed limits of LED temperature.

This will maximize the life time of LED and also consistency of color characteristics.





High Quality LEDs

LED is the heart of a light source. In all Fenos products, LEDs are supplied from the best manufacturers in the world to ensure the constancy in color and quality of light.

Aesthetics of light fixtures It is not only about the light distribution but also the visual appearance of the light fixture is important. Minimalistic design and high quality finishing are also important features of Fenos products.

Innovative **Products Overview**

Vaswa Maxi XS

Are you looking for a light fixture to high light vertical elements of up to 20 meters and still energy efficient? Are you thinking of creating bright spots on the floor to create a more drama feeling in an outdoor environment? Check specification of Vaswa Maxi XS in page 184.



Nian XS

In many indoor architectural lighting applications, an extreme narrow spot light distribution is required to highlight visually important elements.

Nian XS which is a extension of formerly existing Nian family is a perfect solution for that. Check specification of Nian XS in page 60.






Roni

Roni is the other word for flexibility in lighting. White one size and concept of downlight you can have a wide range of light distribution. Check specification of Roni in page 94.



Felka Mini

Felk Mini track lights have the widest range of light distributions. Having special optics from extreme spot (5) to extreme wide (60) makes Felka Mini a perfect solution for high end museums, galleries and retails. Check specification of Felka Mini in page 110.

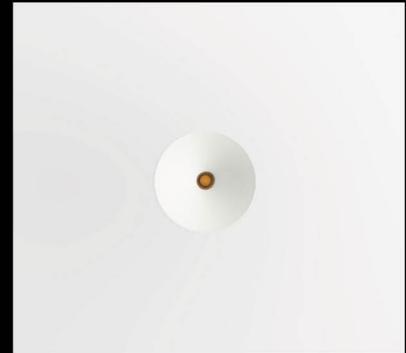

Darklans

Darklans is equiped with an advanced optic developed by Bartenbach Gmbh. This small but still powerful downlight has an aperture of only 8mm, and even when the fixture is and wall washer or oval light distributions, on, one can hardly see any light coming out of it. A real dark light. Check specification of Darklans in page 14.

INDEXIndoor

Ceiling Recessed Light













































INDEXIndoor

Track Light













Linear Light















INDEXOutdoor

Outdoor light Silva Midi Silva Mayi Vaswa Mirii Vaswa Mirii Vaswa Mayi Vaswa Mayi

Accessories







INDEX

Category	Name Pa	ge Number	
	Darklans	14	Ceiling Recessed Light
	Eyren Micro	18	
	Filde Micro	22	
	Filde Mini	26	
	Rico	30	
	Slbron CF-TR	34	
	Sibron C Micro	38	
	Sibron C Mini	42	
	Sibron C Midi	46	
	Sibron C Maxi	50	
	Tiran C Mini	54	
	Nian	60	
	Sibron Q Mini	64	
	Sibron Q Midi	68	
	Sibron Q Maxi	72	
	Eyden Mini	76	
	Eyden L	80	
	Tiran S	84	
****	Fitran Q	90	
Indoor Light	Roni WW	94	
	Roni	98	
	Valman	102	
			To all Hala
	Felka Mini	110	Track Light
	Felka Midi	118	
	Felka Maxi	124	
	Pelka	130	
	Vera	134	
	Vera Twin	138	
			'e
	Sira S 1616	142	Linear Light
	Sira R 1616	146	
	Sira OL	150	
	Sira S 6090	154	
	Sira P 6090	158	
	Sira R 6090	162	
	Sira R 6040	166	
	Silva Midi	172	Profile Light
_	Silva Maxi	176	
Outdoor Light	Vaswa Midi	180	
	Vaswa Maxi	184	
	Torso	188	
	Surface Track 3Phase	194	
Accessories	Accessories	194	
	Krab	196	



Indoor Lighting

Interior architecture is strongly influenced by lighting. Fenos has a wide range of products for professional indoor lighting with different light distributions, sizes and lumen outputs.

Darklans Ceiling Recessed

Darklans






Ceiling Recessed

Because of using a special double focus optic, the light is coming out of a very small hole with just 8mm diameter. As a result, the glare of the light reduced to minimum, so it seems off when the light is on.







F180	
LED	
9	
850 800	
>80	
3000 4000*	
White Black Silver	

IP 70 mm

Supply Voltage: 220-240 Vac,50Hz

Driver:

DALI|Dimmable Version Available upon request


Recommended Applications:
Residential | Office | Shop

Dark is the new bright where you don't see the source of light.

14 Fences

^{*}Customized body colors and other color temperatures (CCTs) are available upon request








Darklans

Light distributions



Accessories

Mandatory



Trimless Installation Kit Order code: 2180924109

Order code table

Body Color	3000 K 🔍	Beam Angle	4000 K 🔍	Body Color
White	F180W930M	Medium	F180W940M	White
Black	F180B930M	Medium	F180B940M	Black
Silver	F180S930M	Medium	F180S940M	Silver

Eyren Micro Ceiling Recessed







Ceiling Recessed







CODE	F190
Light source	LED
Power (W)	9
luminous flux (lm)	990
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black Silver



Supply Voltage: 220-240 Vac,50Hz

Driver:

DALI Dimmable Version Available upon request

Recommended Applications: Residential | Office | Shop


The conical shaped of this fixture and the the deeply placed LED light, make sure that glare is reduced to a minimum when Eyren Micro is installed in the ceiling

^{*}Customized body colors and other color temperatures (CCTs) are available upon request



Eyren Micro

Light distributions

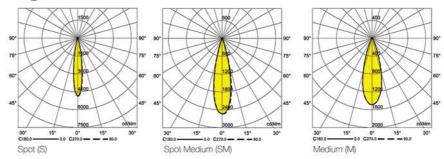

Accessories

Mandatory



Trimless Installation Kit Order code: 2180924109

Order code table

Body Color	3000 K 🔍	Beam Angle	4000 K 🔍	Body Color
	F190W930S	Spot	F190W940S	
White	F190W930SM	Spot-Medium	F190W940SM	White
-	F190W930M	Medium	F190W940M	

Body Color	3000 K ♥	Beam Angle	4000 K 🔍	Body Color
	F190B930S	Spot	F190B940S	
Black	F190B930SM	Spot-Medium	F190B940SM	Black
	F190B930M	Medium	F190B940M	

Body Color	3000 K 🔍	Beam Angle	4000 K ♥	Body Color
	F190S930S	Spot	F190S940S	
Silver	F190S930SM	Spot-Medium	F190S940SM	Silver
	F190S930M	Medium	F190S940M	

Filde Micro Ceiling Recessed




Filde Micro





Ceiling Recessed





15°C	95 mm
₹8 mm	

CODE	F123
Light source	LED
Power (W)	9
luminous flux (lm)	990
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

IP 70 mm

Supply Voltage: 220-240 Vac,50Hz

Driver:

DALI|Dimmable Version Available upon request

Recommended Applications:
Residential | Office | Shop

22 Feeds

^{*}Customized body colors and other color temperatures (CCTs) are available upon request


Filde Micro is a minimal adjustable downlight with different light distributions from spot to wide.



▲ Kafi Abadi Residential


Filde Micro

Light distributions

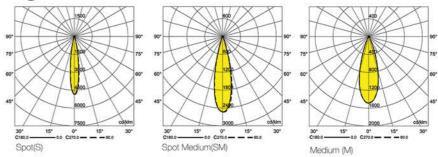

Accessories

Optional



Recessed Kit Order code: 2123924125

Order code table

Body Color	3000 K 🔎	Beam Angle	4000 K 🔍	Body Color
	F123W930S	Spot	F123W940S	
White	F123W930SM	Spot-Medium	F123W940SM	White
	F123W930M	Medium	F123W940M	

Body Color	3000 K 🔍	Beam Angle	4000 K 🔍	Body Color
	F123B930S	Spot	F123B940S	
Black	F123B930SM	Spot-Medium	F123B940SM	Black
	F123B930M	Medium	F123B940M	

Filde Mini

Ceiling Recessed



Filde Mini



Ceiling Recessed





88 mm
90 mm

CODE:	F124
Light source	LED
Power (W)	12
luminous flux (lm)	1300
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

IP 84 mm

Supply Voltage: 220-240 Vac,50Hz

Driver:

DALI|Dimmable Version Available upon request

Recommended Applications:
Residential | Office | Shop


^{*}Customized body colors and other color temperatures (CCTs) are available upon request



▲ Aban Residential

Filde Mini

Light distributions




Accessories





LED GU10 Lamp Order code: 10020101

Optional



Recessed Kit Order code: 2124924125

Order code table

Body Color	3000 K 🔍	Beam Angle	4000 K 🔍	Body Color
\\/\bita	F124W1230S	Spot	F124W1240S	\\/\bita
White -	F124W1230M	Medium	F124W1240M	White

Body Color	3000 K 🔍	Beam Angle	4000 K 🔍	Body Color
Disak	F124B930S	Spot	F124B940S	Disak
Black	F124B930M	Medium	F124B940M	Black

F124BG

Order code for GU10 Version*

Body Color	Body Code	
White	F124WG	_

Lamp is not Included*











Ceiling Recessed





		1
		90 mm
/		A
(110 mm	\longrightarrow

CODE:	F114
Light source	LED
Power (W)	6
luminous flux (lm)	300
Color Rendering (Ra)	>80
Color Temperature (K)	3000
Body Color	White Black

IP 80 mm

Supply Voltage: 220-240Vac 50Hz Recommended Applications: Residential | Office | Shop

*Customized body colors and other color temperatures (CCTs) are available upon request



Light distributions




▲ ASP Residential

Accessories



LED GU10 Lamp Order code: 10020101



Recessed Kit Order code: 2114924125

Order code for GU10 Version*-

Body Color	Body Code	Body Code	Body C
White	F114WG	F114BG	Blac

Lamp is not Included*

S2 Fenos 33

Sibron CF-TR

Ceiling Recessed



Trimless lights are also considered by architects and interior designers in modern architectural monuments, as well as in classical architectural monuments.

Sibron CF-TR can be fitted with a special kit on false ceilings with gymsum tiles (such as Knauf) and also on traditional

Sibron CF-TR





Ceiling Recessed





	108 mm
₹9,5 mm	

CODE	F136
Light source	LED
Power (W)	12
luminous flux (lm)	1300
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

IP 84 mm

Supply Voltage: 220-240 Vac,50Hz

Driver:

DALI|Dimmable Version Available upon request

Recommended Applications: Residential | Office | Shop


^{*}Customized body colors and other color temperatures (CCTs) are available upon request





Sibron CF-TR

Light distributions



Accessories

Optional



LED GU10 Lamp Order code: 10020101

Order code table

Body Color	3000 K 🔍	Beam Angle	4000 K 🔍	Body Color
\\/\=:+=	F136W1230S	Spot	F136W1240S	\A/leite
White	F136W1230M	Medium	F136W1240M	White

Body Color	3000 K 🔍	Beam Angle	4000 K ♥	Body Color
Block	F136B1230S	Spot	F136B1240S	Black
Black	F136B1230M	Medium	F136B1240M	Diack

Order code for GU10 version*-

Body Color	Body Code	Body Code	Body Color
White	F136WG	F136BG	Black

Lamp is not included*

Sibron C Micro Ceiling Recessed



Sibron C Micro



Ceiling Recessed





CODE	F134
Light source	LED
Power (W)	9
luminous flux (lm)	990
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

IP 58 mm

Supply Voltage: 220-240 Vac,50Hz

Driver:

DALI|Dimmable Version Available upon request

Recommended Applications: Residential | Office | Shop

*Customized body colors and other color temperatures (CCTs) are available upon request


98mm

Architect ZAV 2018

▲ Dorin Ston Parsian


Sibron C Micro

Light distributions

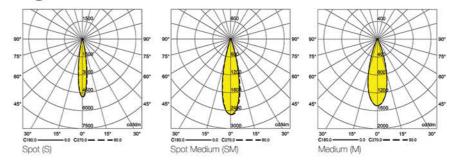

Accessories

Optional



Recessed Kit Order code: 2134924125

Order code table

Body Color	3000 K 🔍	Beam Angle	4000 K ♀	Body Color
	F134W930S	Spot	F134W940S	
White	F134W930SM	Spot-Medium	F134W940SM	White
	F134W930M	Medium	F134W940M	

Body Color	3000 K 🔍	Beam Angle	4000 K 🔍	Body Color
	F134B930S	Spot	F134B940S	
Black	F134B930SM	Spot-Medium	F134B940SM	Black
	F134B930M	Medium	F134B940M	

Sibron C Mini

Ceiling Recessed

ni







Sibron C Mini



Ceiling Recessed







F135
LED
12
1300
>80
3000 4000*
White Black

IP (80 mm

Supply Voltage: 220-240 Vac,50Hz

Driver:

DALI|Dimmable Version Available upon request

Recommended Applications:


Residential | Office | Shop

*Customized body colors and other color temperatures (CCTs) are available upon request

Specific design of the bottom frame with it's strips reduce the direct view to the light point and of course glare

Sibron C Mini

Light distributions




Accessories

Optional



LED GU10 Lamp Order code: 10020101

Optional



Recessed Kit Order code: 2135924125

Order code table

Body Color	3000 K 🔍	Beam Angle	4000 K ●	Body Color
Mhito	F135W1230S	Spot	F135W1240S	Mhito
White	F135W1230M	Medium	F135W1240M	White

Body Color	3000 K 🔍	Beam Angle	4000 K 🔍	Body Color
Black	F135B1230S	Spot	F135B1240S	Black
Diack	F135B1230M	Medium	F135B1240M	Black

Order code for GU10 version*-

Body Color	Body Code	Body Code	Body Color
White	F135WG	F135BG	Black

Lamp is not included*

Sibron C Midi

Ceiling Recessed




Sibron C Midi



Ceiling Recessed







CODE	F137
Light source	LED
Power (W)	20
luminous flux (lm)	2200
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

IP 102mm

Supply Voltage: 220-240 Vac,50Hz


Driver:

DALI|Dimmable Version Available upon request

Recommended Applications: Office | Shop


*Customized body colors and other color temperatures (CCTs) are available upon request

Specific design of the bottom frame with it's strips reduce the direct view to the light point and of course glare

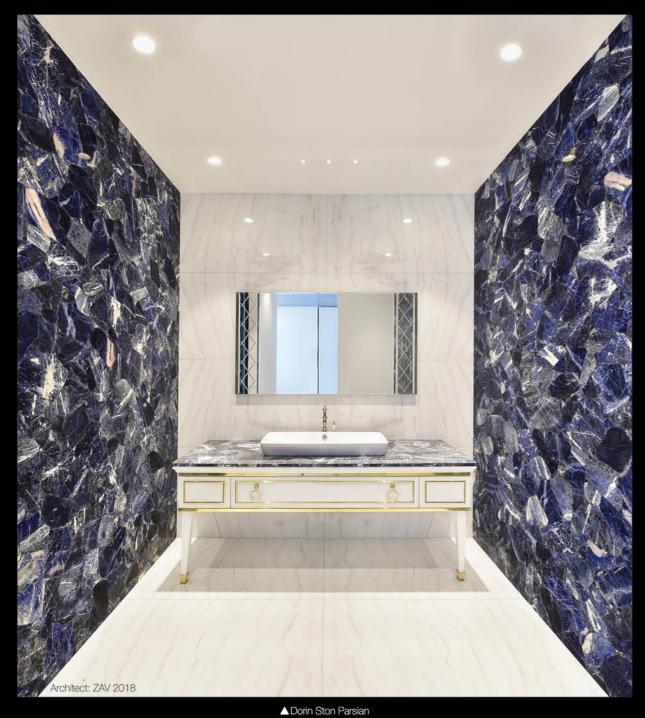

Sibron C Midi

Light distributions



Accessories

Optional



Recessed Kit Order code: 2137924125

Order code table

Body Color	3000 K 🔍	Beam Angle	4000 K 🔍	Body Color
	F137W2030S	Spot	F137W2040S	
White -	F137W2030M	Medium	F137W2040M	White

Body Color	3000 K 🔍	Beam Angle	4000 K	Body Color
Plack	F137B2030S	Spot	F137B2040S	Block
Black	F137B2030M	Medium	F137B2040M	Black

Sibron C Maxi

Ceiling Recessed

















CODE	F138
Light source	LED
Power (W)	30
luminous flux (lm)	3300
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

IP 130 mm

Supply Voltage: 220-240 Vac,50Hz

Driver:

DALI|Dimmable Version Available upon request

Recommended Applications: Office | Shop


Specific design of the bottom frame with it's strips reduce the direct view to the light point and of course glare

50 Feres

^{*}Customized body colors and other color temperatures (CCTs) are available upon request


Sibron C Maxi

Light distributions



Accessories

Optional




Recessed Kit Order code: 2138924125

Order code table

Body Color	3000 K 🔍	Beam Angle	4000 K ♥	Body Color
	F138W3030S	Spot	F138W3040S	140.0
White	F138W3030M	Medium	F138W3040M	White

Body Color	3000 K 🔍	Beam Angle	4000 K ●	Body Color
Dlack	F138B3030S	Spot	F138B3040S	Disale
Black	F138B3030M	Medium	F138B3040M	Black

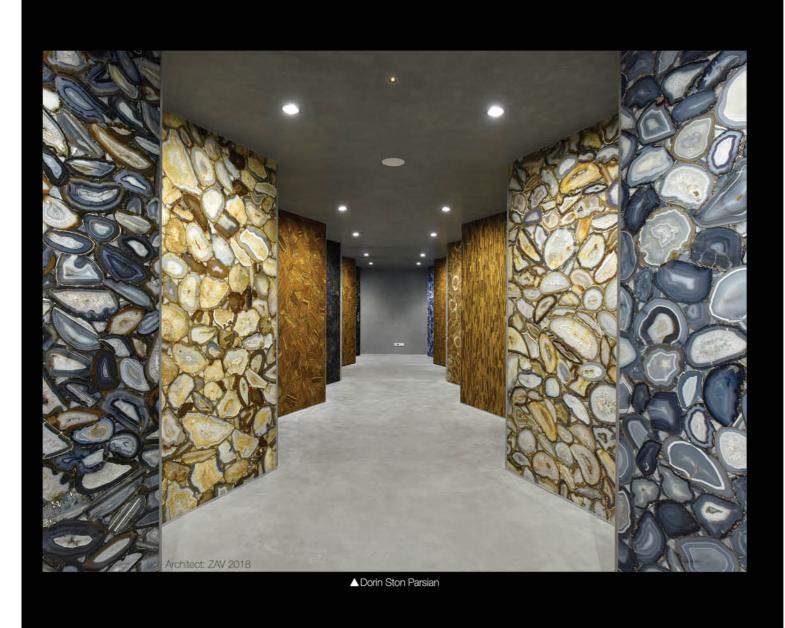

Tiran C Mini

Ceiling Recessed



Tiran C Mini



Ceiling Recessed





	90 m
15°C 100 mm)

CODE	F127
Light source	LED
Power (W)	12
luminous flux (lm)	1300
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

IP 90 mm

Supply Voltage: 220-240 Vac,50Hz


Driver:

DALI|Dimmable Version Available upon request

Recommended Applications:
Residential | Office | Shop


*Customized body colors and other color temperatures (CCTs) are available upon request

The contrast between square shape of the frame and round shape of light source is an interesting feature for many designers.

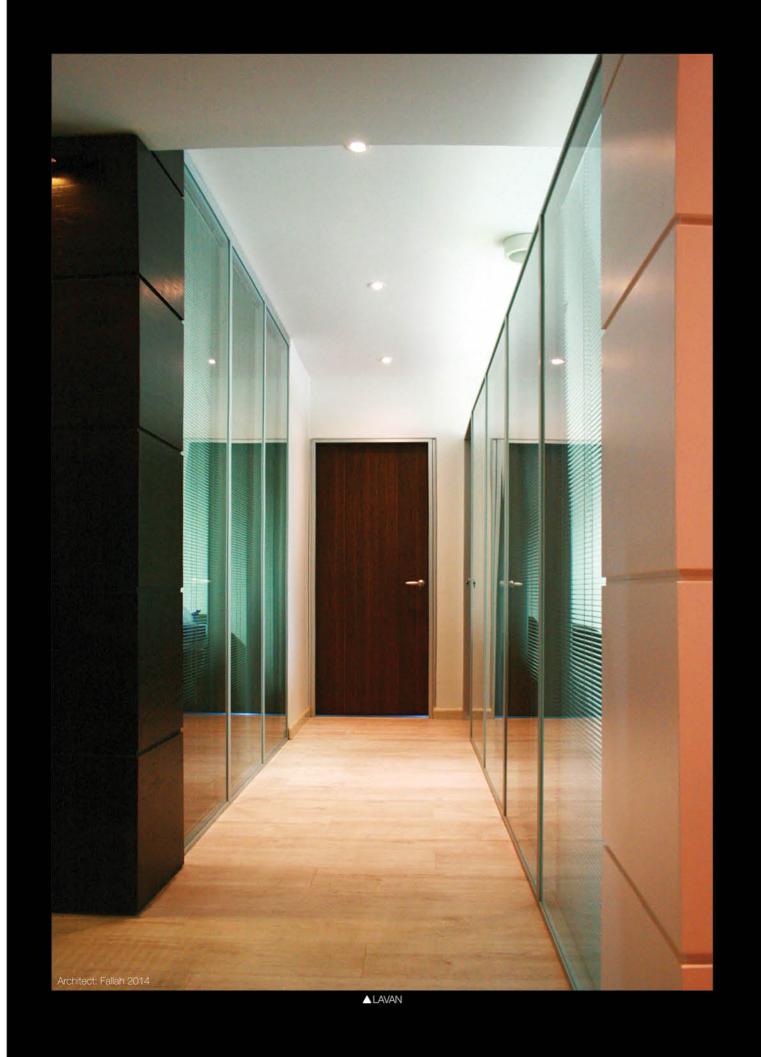

Tiran C Mini

Light distributions




Accessories

Optional



LED GU10 Lamp Order code: 10020101

Optional



Recessed Kit Order code: 2127924125

Order code table -

Body Color	3000 K 🔍	Beam Angle	4000 K 🔍	Body Color
White	F127W1230S	Spot	F127W1240S	White
vviiite	F127W1230M	Medium	F127W1240M	vviille
Body Color	3000 K 🍳	Beam Angle	4000 K ●	Body Color
Black	F127B1230S	Spot	F127B1240S	Plack
DIACK	F127B1230M	Medium	F127B1240M	Black

Order code for GU10 version*-

Body Color	Body Code	Body Code	Body Color
White	F127WG	F127BG	Black

Lamp is not included*







Accent lighting is one of the key elements in architectural lighting design. Spot lighting on objects, attracts people's attention to that object, and creates the feeling of drama in the space.

We as human being like shadows. A completely uniform lit environment resembles a cloudy day for us. The extreme narrow beam of Nian XS family, generated by a sophisticated high tech optic and a powerful compact light source is a good solution.

In retail environment, increase level of contrast between light and dark spaces, gives a feeling of more luxury and special feeling to the customer.

Nian





Ceiling Recessed





15°C	148 mm
119 mm	

F130
LED
9 12
600 1320
>80
3000 4000*
White&Black

IP 95 mm

Supply Voltage: 220-240 Vac,50Hz

Driver:

DALI Dimmable Version Available upon request

Recommended Applications:


Residential | Office | Shop | Restaurant

50 Ferres

^{*}Customized body colors and other color temperatures (CCTs) are available upon request






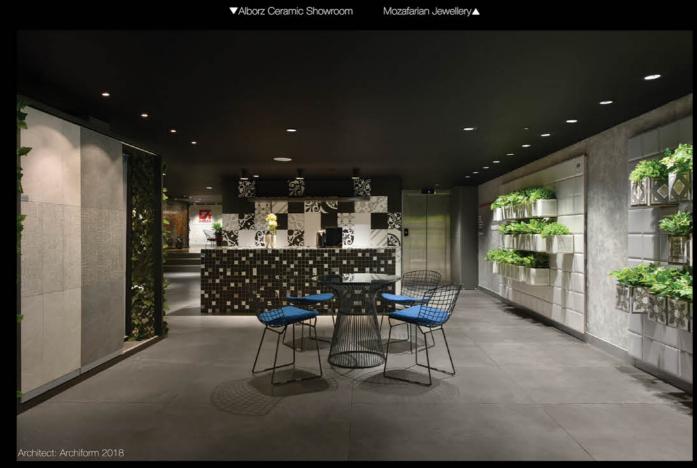


Nian

Light distributions



Accessories

Optional



Recessed Kit Order code: 2130924125

Order code table

Body Color	3000 K 🔍	Beam Angle	4000 K ♥	Body Color
White	F130WB930XS	Extreme Spot	F130WB930XS	White
& Black	F130WB1230M	Medium	F130WB1240M	& Black

Sibron Q Mini

Ceiling Recessed



Sibron Q Mini









	102m
	102mi
₩ 08 mm	\rightarrow

CODE	F140
Light source	LED
Power (W)	12
luminous flux (lm)	1300
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

IP 70 mm

Supply Voltage: 220-240 Vac,50Hz

Driver:

DALI|Dimmable Version Available upon request

Recommended Applications: Residential | Office | Shop


^{*}Customized body colors and other color temperatures (CCTs) are available upon request

Architect: Persian Garden 2018



Sibron Q Mini

Light distributions




Accessories

Optional



LED GU10 Lamp Order code: 10020101

Optional



Recessed Kit Order code: 2140924125

Order code table

Body Color	3000 K 🔍	Beam Angle	4000 K 🔍	Body Color
\A/leite	F140W1230S	Spot	F140W1240S	Mhito
White =	F140W1230M	Medium	F140W1240M	White

Body Color	3000 K 🔍	Beam Angle	4000 K ♀	Body Color
Plack	F140B1230S	Spot	F140B1240S	Black
Black	F140B1230M	Medium	F140B1240M	Diack

Order code for GU10 version*-

Body Color	Body Code	Body Code	Body C
White	F140WG	F140BG	Bla

Lamp is not included*

Sibron Q Midi

Ceiling Recessed



Sibron Q Midi



Ceiling Recessed





CODE	F141	
Light source	LED	
Power (W)	20	
luminous flux (lm)	2200	
Color Rendering (Ra)	>80	
Color Temperature (K)	3000 4000*	
Body Color	White Black	



Supply Voltage: 220-240 Vac,50Hz

Driver:

DALI|Dimmable Version Available upon request

Recommended Applications: Hotel | Office | Shop

100 mm

108mm

^{*}Customized body colors and other color temperatures (CCTs) are available upon request


▲ Aban Residential ▼






Sibron Q Midi

Light distributions



Accessories

Optional



Recessed Kit Order code: 2141924125

Order code table

Body Color	3000 K 🔍	Beam Angle	4000 K ♀	Body Color
White	F141W1230S	Spot	F141W1240S	White
	F141W1230M	Medium	F141W1240M	vvriite

Body Color	3000 K 🔍	Beam Angle	4000 K 🔍	Body Color
Black	F141B1230S	Spot	F141B1240S	Black
	F141B1230M	Medium	F141B1240M	Diack

Sibron Q Maxi

Ceiling Recessed



Sibron Q Maxi



Ceiling Recessed





	140mm
130mm	,

CODE	F142
Light source	LED
Power (W)	30
luminous flux (lm)	3300
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000
Body Color	White Black

IP 115 mm

Supply Voltage: 220-240 Vac,50Hz

Driver:

DALI|Dimmable Version Available upon request


Recommended Applications: Hotel | Office | Shop

^{*}Customized body colors and other color temperatures (CCTs) are available upon request




Sibron Q Maxi

Light distributions



Accessories

Optional



Recessed Kit Order code: 2142924125

Order code table

Body Color	3000 K 🔎	Beam Angle	4000 K 🔍	Body Color
White	F142W1230S	Spot	F142W1240S	Mhito
vvriite	F142W1230M	Medium	F142W1240M	White
Body Color	3000 K 🌻	Beam Angle	4000 K ♀	Body Color

Body Color	3000 K 💛	Beam Angle	4000 K	Body Color
Black	F142B1230S	Spot	F142B1240S	Black
Diack	F142B1230M	Medium	F142B1240M	Black

Eyden Mini


Ceiling Recessed













80 mm
102 mm

F150	
LED	
10	
1100	
>80	
3000 4000*	
White Black	
	LED 10 1100 >80 3000 4000*

1P 95X95 mm 113X113 mm (Trimless Version)

Supply Voltage: 220-240 Vac,50Hz


Driver:

DALI|Dimmable Version Available upon request

Recommended Applications: Residential | Office | Shop


*Customized body colors and other color temperatures (CCTs) are available upon request

Pure minimal design and low glare

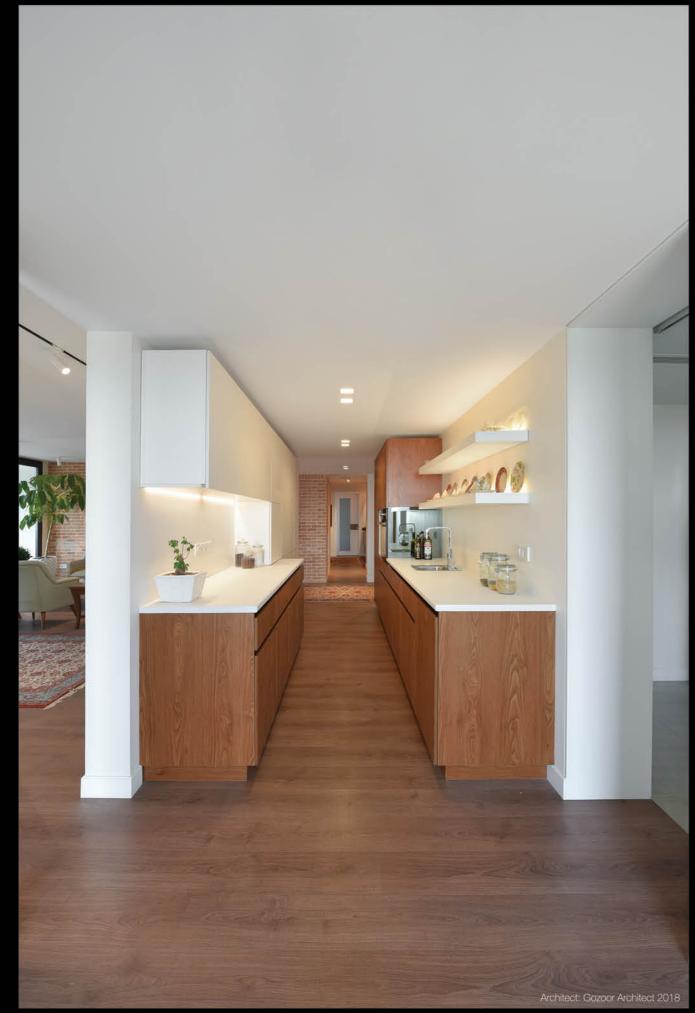


Eyden Mini

Light distributions



Accessories


Mandatory



Trimless Installation Kit Order code: 2099924117

*For Trimless Version Only

Optional



Recessed Kit Order code: 2150924125

Order code table

Body Color	3000 K 🔍	Beam Angle	4000 K ●	Body Color
White	F150W1030W	Wide	F150W1040W	White
Black	F150B1030W	Wide	F150B1040W	Black

Order code table trimless version -

Body Color	3000 K O	Beam Angle	4000 K 🔎	Body Color
White	F153W1030W	Wide	F153W1040W	White
Black	F153B1030W	Wide	F153B1040W	Black

▲ASP Residential

Eyden L Ceiling Recessed















CODE	F152
Light source	LED
Power (W)	15
luminous flux (lm)	1500
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000
Body Color	White Black White&Blac

IP 95X95 mm 113X113 mm (Trimless Version)

Supply Voltage: 220-240 Vac,50Hz

Driver:


DALI|Dimmable Version Available upon request

Recommended Applications:
Residential | Office

*Customized body colors and other color temperatures (CCTs) are available upon request


This simple square luminaire with deep regressed positioning of the LED guarantees minimal glare

80 Feres

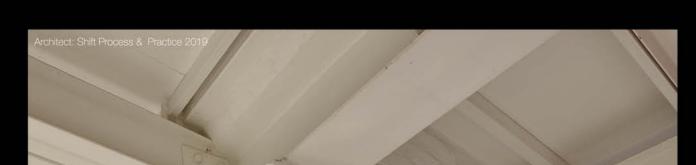




Light distributions




Accessories

Mandatory



Trimless Installation Kit Order code: 2099924117 *For Trimless Version Only

Optional



Recessed Kit Order code: 2152924125

Order code table

Body Color	3000 K 🔍	Beam Angle	4000 K ♥	Body Color
White	F152W1530W	Wide	F152W1540W	White
Black	F152B1530W	Wide	F152B1540W	Black
White	F152WB1530W	Wide	F152WB1540W	White

Order code table trimless version

Body Color	3000 K 🔍	Beam Angle	4000 K 🔍	Body Color
White	F154W1530W	Wide	F154W1540W	White
Black	F154B1530W	Wide	F154B1540W	Black
White	F154WB1530W	Wide	F154WB1540W	White







Tiran S



Ceiling Recessed





	Î
10°C	100 mm
101 mm > (101 mm	7

CODE	F120	
Light source	LED	
Power (W)	9	
luminous flux (Im)	990	
Color Rendering (Ra)	>80	
Color Temperature (K)	3000 4000*	
Body Color	White Black	
-		

195X95 mm 113X113 mm(Trimless Vesrsion)

Supply Voltage: 220-240 Vac,50Hz

Driver:

DALI|Dimmable Version Available upon request


Recommended Applications:
Residential | Office | Shop

The contrast between square shape of the frame and round shape of light source is an interesting feature for many designers.

^{*}Customized body colors and other color temperatures (CCTs) are available upon request

Tiran S


Light distributions

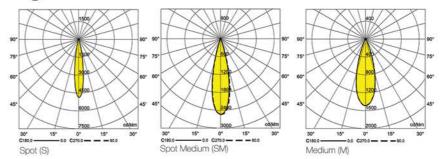

Accessories







Order code: 10020101

Recessed Kit Order code: 2120924125

Order code table -


Body Color	3000 K 🔍	Beam Angle	4000 K 🔍	Body Color
	F120W930S	Spot	F120W940S	
White	F120W930SM	Spot - Medium	F120W940SM	White
	F120W930M	Medium	F120W940M	
Body Color	3000 K 🔍	Beam Angle	4000 K ●	Body Color
	F120B930S	Spot	F120B940S	

Body Color	3000 K 🔍	Beam Angle	4000 K 🔍	Body Color
	F120B930S	Spot	F120B940S	
Black	F120B930SM	Spot - Medium	F120B940SM	Black
	F120B930M	Medium	F120B940M	

Order code for GU10 version*

Body Color	Body Code	Body Code	Body Color
White	F122WG	F122BG	Black


Lamp is not included*

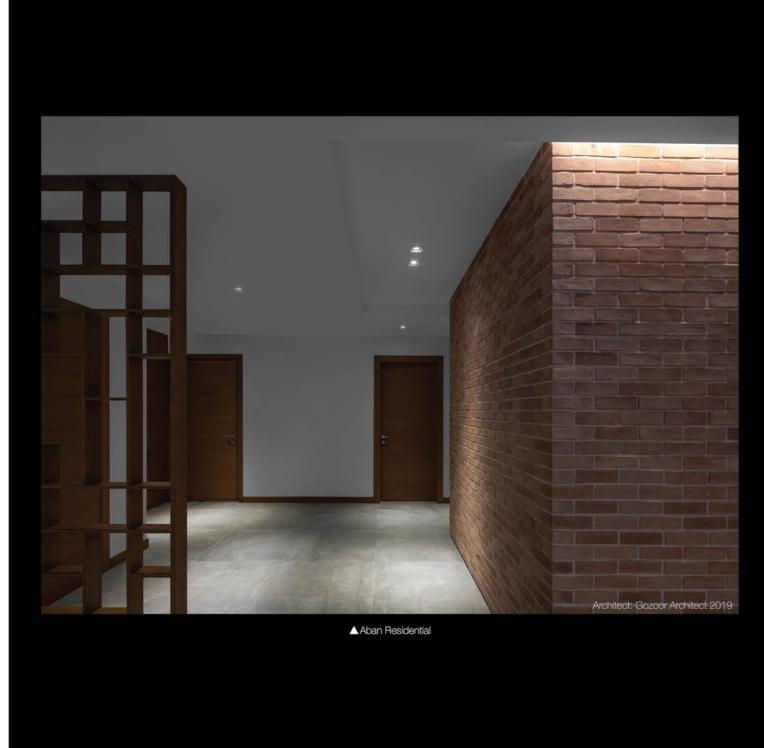

Architect: Persian Garden ▲ JTI Office

Tiran S Trimless

Light distributions

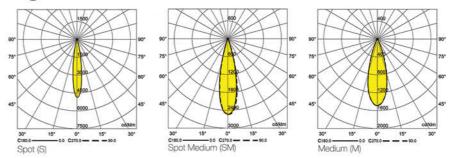


Accessories

Optional



LED GU10 Lamp Order code: 10020101

Mandatory*



Trimless Installation Kit Order code: 2099924117

*For Trimless Version Only

Trimless version Order code table

Body Color	3000 K 🔍	Beam Angle	4000 K 🗣	Body Color
	F121W930S	Spot	F121W940S	
White	F121W930SM	Spot - Medium	F121W940SM	White
	F121W930M	Medium	F121W940M	

Body Color	3000 K 🔍	Beam Angle	4000 K 🔮	Body Color
	F121B930S	Spot	F121B940S	
Black	F121B930SM	Spot - Medium	F121B940SM	Black
	F121B930M	Medium	F121B940M	

Trimless version Order code for GU10*-

Body Color	Body Code	Body Code	Body Color
White	F126WG	F126BG	Black

Lamp is not included*

Fitran Q Ceiling Recessed



















CODE:	F119
Light source	LED
Power (W)	12
luminous flux (lm)	1300
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

1P 95X95 mm 113X113 mm (Trimless Version)

Supply Voltage: 220-240 Vac,50Hz

Driver:

DALI|Dimmable Version Available upon request

Recommended Applications:
Residential | Office | Shop


^{*}Customized body colors and other color temperatures (CCTs) are available upon request





Fitran Q

Light distributions



Accessories


Optional



LED GU10 Lamp Order code: 10020101

Mandatory

Trimless Installation Kit Order code: 2099924117 *For Trimless Version Only



Recessed Kit Order code: 2119924125

Order code table

Body Color	3000 K 🔎	Beam Angle	4000 K 🔍	Body Color
White	F119W1230S	Spot	F119W1240S	White
vville	F119W1230M	Medium	F119W1240M	VVIIILE
Body Color	3000 K 🔍	Beam Angle	4000 K ♥	Body Color
Black	F119B1230S	Spot	F119B1240S	Black
Black	F119B1230M	Medium	F119B1240M	DIACK

Trimless version Order code table

Body Color	3000 K 🔎	Beam Angle	4000 K 🔍	Body Color
White	F129W1230S	Spot	F129W1240S	White
vviille	F129W1230M	Medium	F129W1240M	vviille
Body Color	3000 K ♥	Beam Angle	4000 K ♥	Body Color
Black	F129B1230S	Spot	F129B1240S	Black
DIACK	F129B1230M	Medium	F129B1240M	Diack

Order code for GU10 version*

Body Color	Body Code	Body Code	Body Color
White	F119WG	F119BG	Black










Ceiling Recessed





F185
LED
12
1300
>80
3000 4000
White

^{*} Customized body color and other light colors are also available upon request





Supply Voltage: 220-240 Vac,50Hz

Driver:


DALI Dimmable Version Available upon request

Recommended Applications:

Residential | Office | Shop | Gallery Museum


Roni WW is the wallwasher version of Roni family. It provides a uniform illumination on the wall surface, a perfect solution for highlighting architectural features of a building as well as lighting of galleries and museums. It's special design, makes the glare as low as possible.



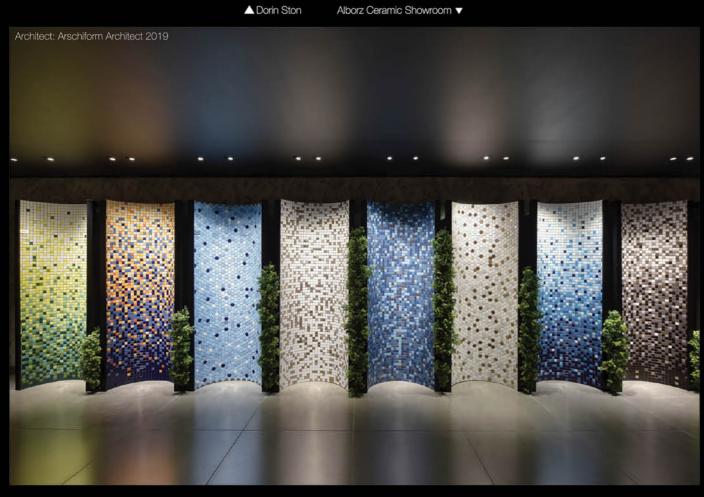

Roni WW

Light distributions




Accessories

Optional



Trimless Installation Kit Order code: 2185924111 For Trimless Installation

Optional



Recessed Kit Order code: 2185924125

Order code table

Body Color	3000 K 🔍	Beam Angle	4000 K ●	Body Color
White	F185W1230WW	Wallwasher	F185W1240WW	White












Ceiling Recessed









CODE	F185
Light source	LED
Power (W)	12
luminous flux (lm)	1300
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White

IP (184 mm Supply Voltage: 220-240 Vac,50Hz

Driver:
DALI|Dimmable Version Available upon request

Recommended Applications: Residential | Office | Shop

*Customized body colors and other color temperatures (CCTs) are available upon request

Oval









Roni

Light distributions

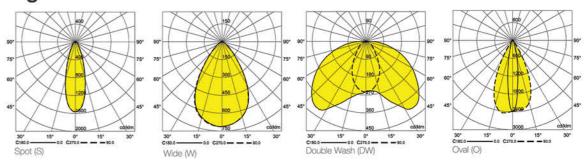

Accessories

Optional



Recessed Kit Order code: 2185924125

Order code table

Body Color	3000 K 🔍	Beam Angle	4000 K 🔍	Body Color
	F185W1230S	Spot	F185W1240S	
White	F185W1230W	Wide	F185W1240W	White
wille =	F185W1230O	Oval	F185W1240O	VVIIILE
	F185W1230DW	Double Wash	F185W1240DW	


















00000	
	105 mm
	Į.
135 mm	

F160
LED
30
3400
>80
3000 4000
White

Supply Voltage:

IP 125 mm

220-240 Vac,50Hz

Driver:

DALI Dimmable Version Available upon request

Recommended Applications: Office | Shop

Vertical illumination is becoming more and more important for architects and lighting designers. It is important for architects because it reveals the feel of the space, and helps the place to become even more inviting. It is important for shop owners because it makes the shop become more visible and appear brighter from outside. In an office it helps to provide better visual comfort.

102

^{*}Customized body colors and other color temperatures (CCTs) are available upon request









Valman

Light distributions



Accessories

Optional




Recessed Kit Order code: 2160924125

Order code table

Body Color	3000 K 🍳	Beam Angle	4000 K	Body Color
White	F160W3030WW	Wallwasher	F160W3040WW	White



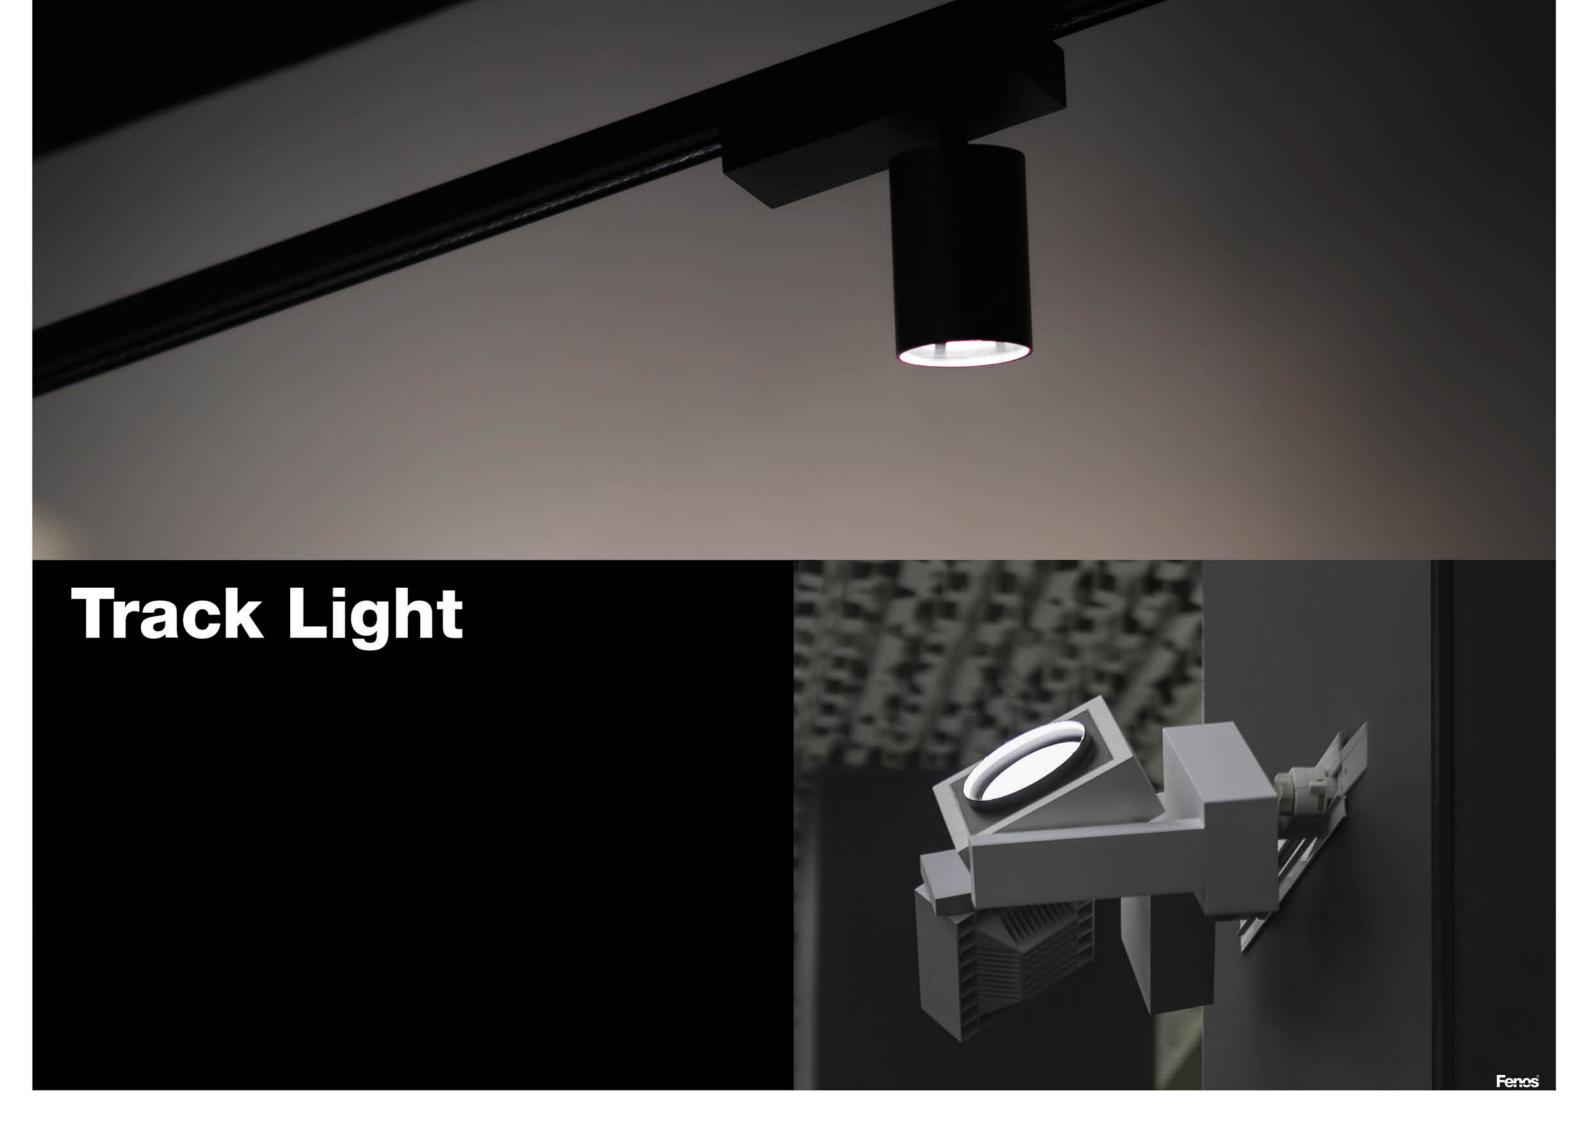

Felka Mini

Track Light




Felka Mini









CODE	F315
Light source	LED
Power (W)	12
luminous flux (lm)	1300 1320
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

^{*}Customized body colors and other color temperatures (CCTs) are available upon request



Supply Voltage: 220-240 Vac,50Hz

Driver:

DALI|Dimmable Version Available upon request

Recommended Applications:
Residential | Office | Shop | Gallery Museum


9 Different light distributions for almost all applications





Felka Mini

Light distributions

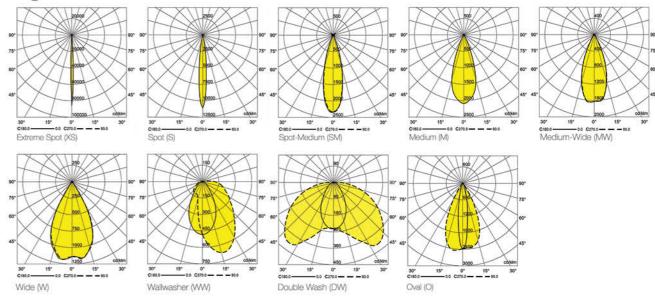

Accessories

Track



Reference to page 194


Order code table

Body Color	3000 K 💡	Beam Angle	4000 K 💡	Body Color
	F315W1230XS	Extreme Spot	F315W1240XS	
	F315W1230S	Spot	F315W1240S	
	F315W1230SM	Spot-Medium	F315W1240SM	
	F315W1230M	Medium	F315W1240M	
White	F315W1230MW	Medium-Wide	F315W1240MW	White
	F315W1230W	Wide	F315W1240W	
	F315W1230WW	Wallwasher	F315W1240WW	
	F315W1230DW	Double Wash	F315W1240DW	
	F315W1230O	Oval	F315W1240O	

Body Color	3000 K 💡	Beam Angle	4000 K 🔍	Body Color
	F315B1230XS	Extreme Spot	F315B1240XS	
	F315B1230S	Spot	F315B1240S	
	F315B1230SM	Spot-Medium	F315B1240SM	
	F315W1230M	Medium	F315B1240M	
Black	F315B1230MW	Medium-Wide	F315B1240MW	Black
	F315B1230W	Wide	F315B1240W	
	F315B1230WW	Wallwasher	F315B1240WW	
	F315B1230DW	Double Wash	F315B1240DW	
	F315W1230O	Oval	F315B1240O	


Felka Mini

Track Light

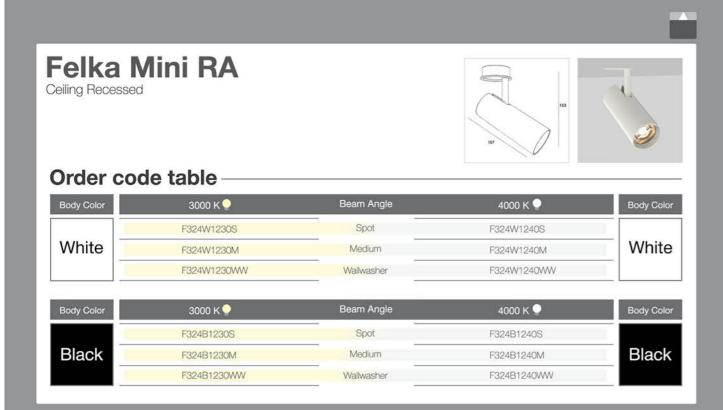





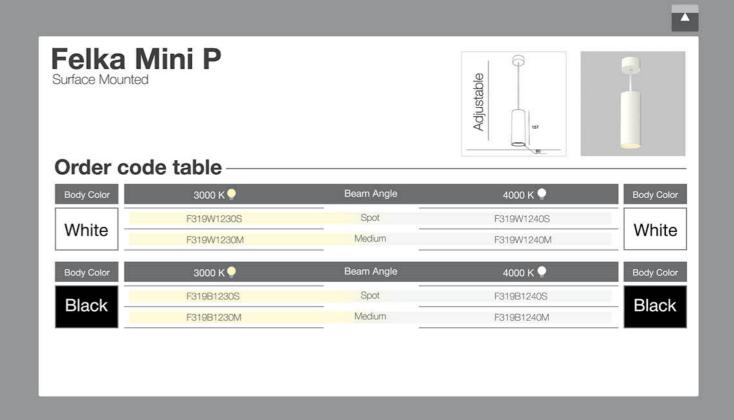

4 Ferros 1/15




Track Light

Felka Midi









CODE	F325
Light source	LED
Power (W)	20
luminous flux (lm)	2200
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000
Body Color	White Black

*Customized body colors and other color temperatures (CCTs) are available upon request



Supply Voltage: 220-240 Vac,50Hz

Driver:

DALI|Dimmable Version Available upon request

Recommended Applications: Office | Commercial Center


Residential | Shop





Felka Midi

Light distributions

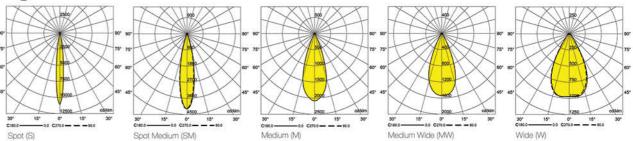

Accessories

Track



Reference to page 194


Order code table


Body Color	3000 K 🔎	Beam Angle	4000 K 🝨	Body Color
	F325W1230S	Spot	F325W1240S	
	F325W1230SM	Spot Medium	F325W1240SM	
White	F325W1230M	Medium F325W1240M	White	
	F325W1230MW	Medium Wide	F325W1240MW	
	F325W1230W	Wide	F325W1240W	

Body Color	3000 K 🔮	Beam Angle	4000 K 🕊	Body Color
	F325B1230S	Spot	F325B1240S	
	F325W1230SM	Spot Medium	F325B1240SM	1
Black	F325B1230M	Medium	F325B1240M	Black
	F325W1230MW	Medium Wide	F325B1240MW	7
	F325W1230W	Wide	F325B1240W	


Felka Midi

Track Light

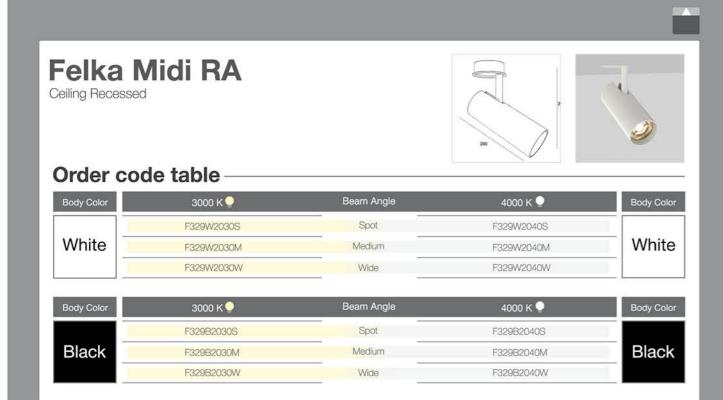

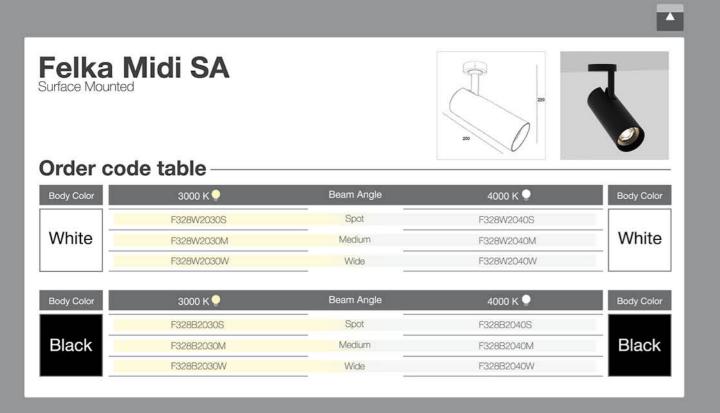



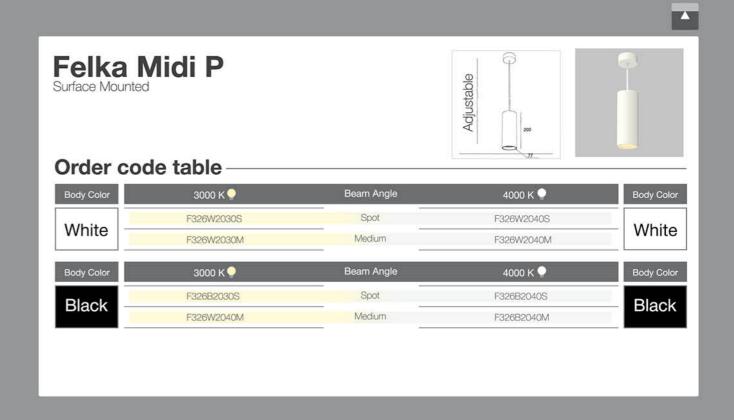

Felka Maxi

Track Light











IP 100 mm (For RA Version)

312 mm

Supply Voltage: 220-240 Vac,50Hz


Driver:

DALI|Dimmable Version Available upon request

Recommended Applications:
Residential | Office | Shop

*Customized body colors and other color temperatures (CCTs) are available upon request

For Retail and High Ceiling Applications

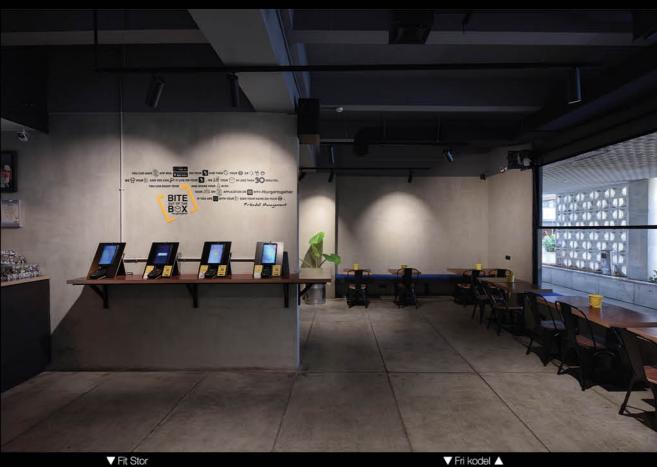






Felka Maxi

Light distributions

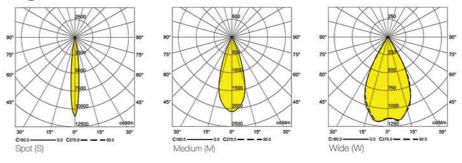

Accessories

Track



Reference to page 194

Order code table

Body Color	3000 K ♀	Beam Angle	4000 K 🜻	Body Color	
	F316W3030S	Spot F316W30408	Spot	F316W3040S	
White	F316W3030M	Medium	F316W3040M	White	
	F316W3030W	Wide	F316W3040W		

Body Color	3000 K ♥	Beam Angle	4000 K 🔮	Body Color
	F316B3030S	Spot	F316W3040S	
Black	F316B3030M	Medium	F316W3040M	Black
	F316B3030W	Wide	F316W3040W	

Felka Maxi


F323B3030M

F323B3030W

* Customized body color and other light colors are also available upon request

Track Light


Black

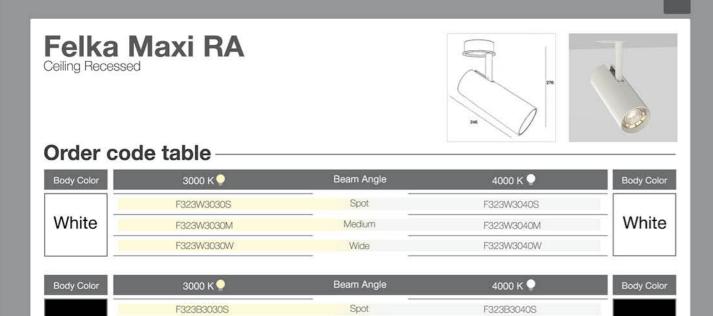



F323B3040M

F323B3040W

Black

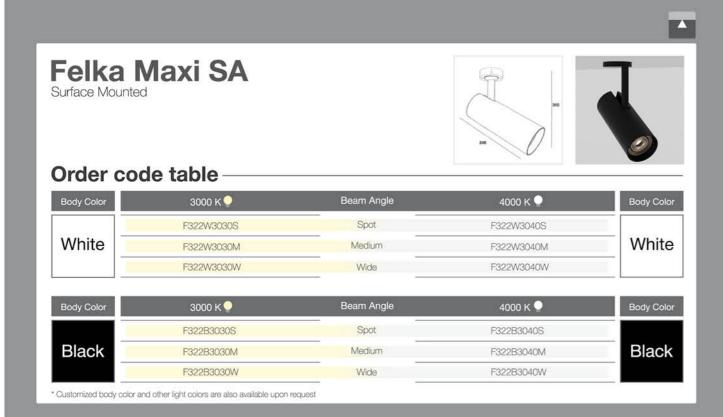

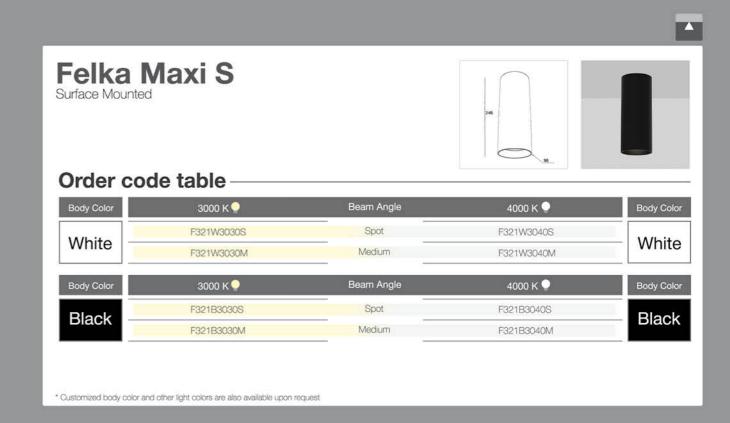

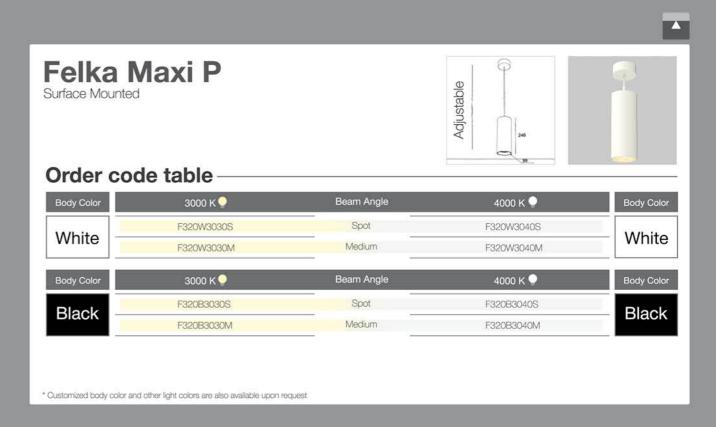



Pelka



Track Light



CODE	F310
Light source	LED
Power (W)	30
luminous flux (lm)	3300
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

*Customized body colors and other color temperatures (CCTs) are available upon request

IP 20

Supply Voltage: 220-240 Vac,50Hz Driver: DALI|Dimmable Version Available upon request

Recommended Applications:
Residential | Office | Shop

Pelka


Track Light







Light distributions



Accessories

Track



Reference to page 194

Order code table -

Body Color	3000 K	Beam Angle	4000 K 🔍	Body Color
White	F310W3030S	Spot	F310W3040S	White
wille	F310W3030W	Wide	F310W3040W	vviile

Body Color	3000 K 🔍	Beam Angle	4000 K 🔍	Body Color
Black	F310B3030S	Spot	F310B3040S	Dlack
	F310B3030W	Wide	F310B3040W	Black











Track Light







90°C	150 mm 3.50°	198 mm
\[\]	130 mm	

F300	
LED	
35	
3650	
>80	
3000 4000*	
White Black	
	LED 35 3650 >80 3000 4000*

IP 20

Supply Voltage: 220-240 Vac,50Hz Driver: DALI|Dimmable Version Available

upon request

Recommended Applications:

Office | Shop | Museum

For Retail and High Ceiling Applications


^{*}Customized body colors and other color temperatures (CCTs) are available upon request







Light distributions



Accessories

Track



Reference to page 194

Order code table

Body Color	3000 K 💡	Beam Angle	4000 K 💡	Body Color
\A/bita	F300W3530S	Spot	F300W3540S	White
White	F300W3530W	Wide	F300W3540W	

Body Color	3000 K 💡	Beam Angle	4000 K 🍨	Body Color
Disale	F300B3530S	Spot	F300B3540S	Dlook
Black	F300B3530W	Wide	F300B3540W	Black




Vera Twin

Powerful track light with low height and high flexibility in installation

Track Light




Vera Twin

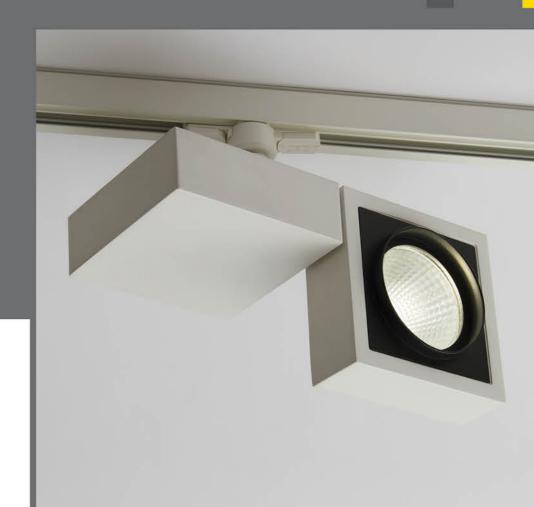

Track Light





CODE	F305
Light source	LED
Power (W)	35
luminous flux (lm)	3850
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

Supply Voltage: 220-240 Vac,50Hz


Driver:

DALI|Dimmable Version Available upon request

Recommended Applications:
Residential | Office | Shop


^{*}Customized body colors and other color temperatures (CCTs) are available upon request



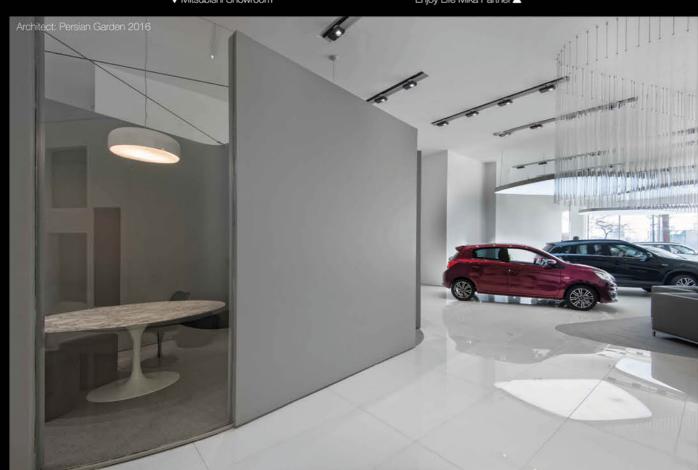

Vera Twin

Light distributions



Accessories

Track



Reference to page 194

Order code table -

Body Color	3000 K ♀	Beam Angle	4000 K 🔮	Body Color
White	F305W3530S	Spot	F305W3540S	White
	F305W3530W	Wide	F305W3540W	

Body Color	3000 K 💡	Beam Angle	4000 K 🌻	Body Color
Dlask	F305B3530S	Spot	F305B3540S	Dlook
Black	F305B3530W	Wide	F305B3540W	Black

Sira S 1616

Sira S 1616



CODE	F465
Light source	LED
Body Color	White Black Silver

*Customized body colors and other color temperatures (CCTs) are available upon request

Recommended Applications:
Residential | Office | Shop

Very small and compact, suitable for many applications where size is limited




▲ Loutka Restaurant | Kafi Abadi Residential ▼




sira S 1616

Light distributions




Acessories


Surface Installation



Sira S1616 Bracket



LED Strip
Reference to page 196




Reference to page 196

Order code table

Body Color	Order code	Beam Angle	
Withe	F465WW	Wide	
Black	F465BW	Wide	
Silver	F465SW	Wide	


Profile

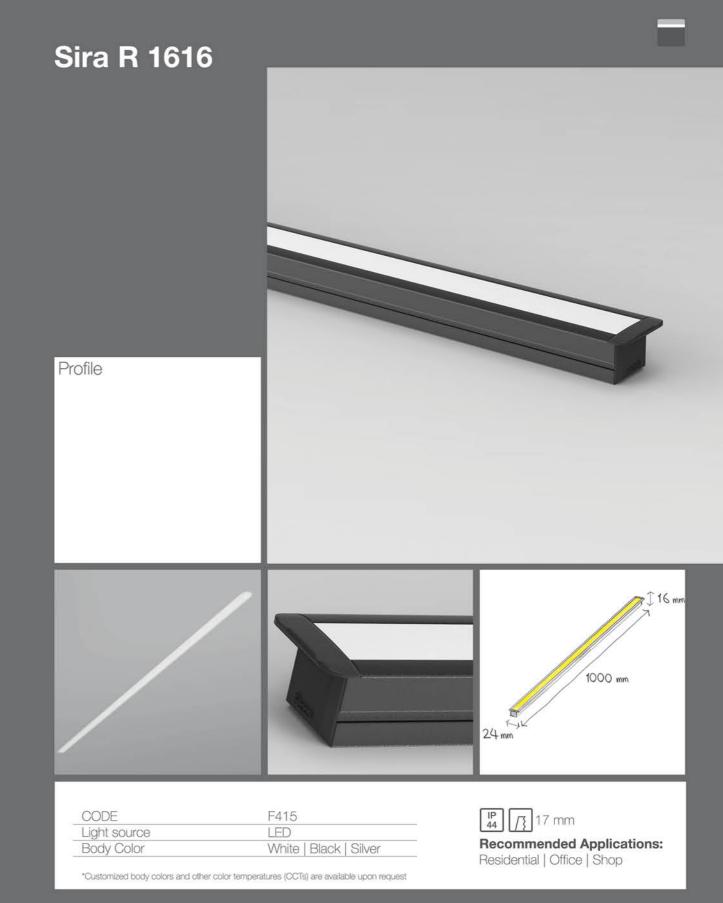

Very small and compact, suitable for recessed applications where size is limited such as shelf lighting.




Light distributions




Accessories

Recessed Installation



Sira R 1616 Bracket

Optional



LED Strip Reference to page 196

Order code table

Body Color	Order code	Beam Angle	
Withe	F415WW	Wide	
Black	F415BW	Wide	
Silver	F415SW	Wide	



Architect: Shift Process & Practice 2018

▲ Alibaba Centeral Office








CODE	F465	
Light source	LED	
Body Color	Silver	

*Customized body colors and other color temperatures (CCTs) are available upon request



Recommended Applications:
Residential | Office | Shop | Garden
Facade


Very small and compact, suitable for many applications where size is limited

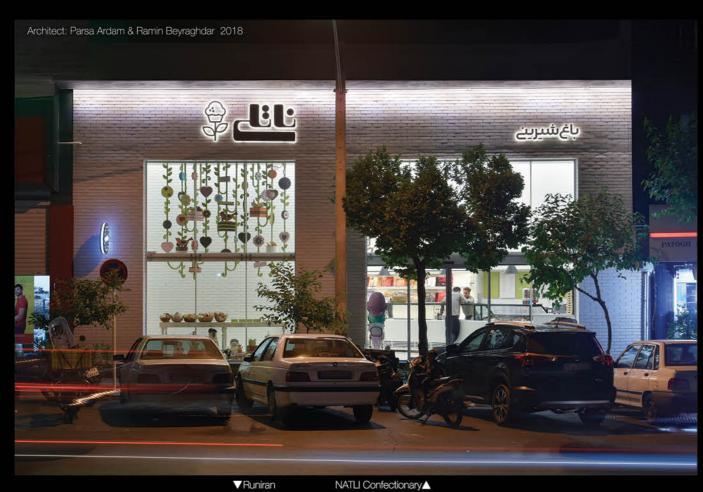




Sira OL

Light distributions



Accessories

Surface Installation



Sira OL Bracket

Optional




Order code table

Body Color	3000 K 🔍	Beam Angle	4000 K 🔍	Body Color
Silver	F465SW	Wide	F465SW	Silver

Sira S 6090

Recessed Linear

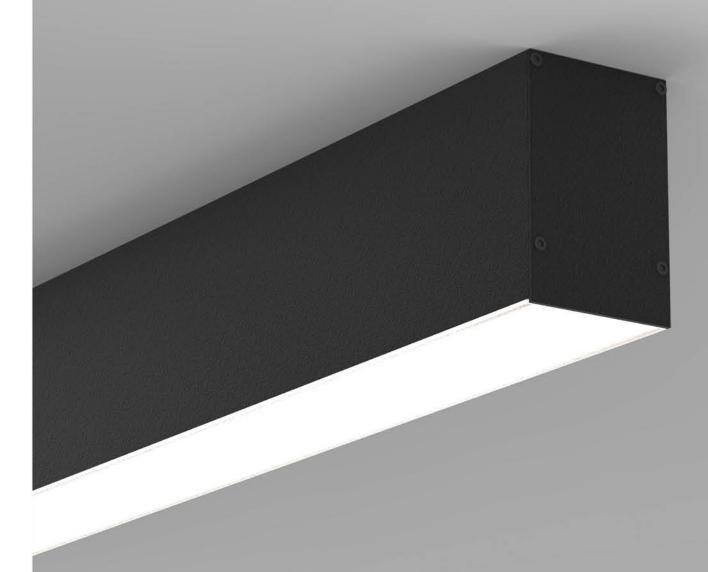

Sira S 6090



CODE	F451
Light source	LED
Power (W/m)	30
luminous flux (lm/m)	4000
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

*Customized body colors and other color temperatures (CCTs) are available upon request

Trimless Version

IP 83 mm (Trimless Version)

Supply Voltage: 220-240 Vac,50Hz

Driver:

DALI|Dimmable Version Available upon request

Recommended Applications:
Residential | Office | Shop


Continuous Linear light with 60 mm light emitting width






Sira S 6090

Light distributions



Accessories

Recessed Installation



Trimless Installation Kit
Order code: 2451924125
*For more details to installation details in our website

Optional



Order code: White: 2451215106 Black: 2451115106

Solid Aluminium Cover

Order code table

Body Color	3000 K ♥	Beam Angle	4000 K ♀	Body Color
White	F451W3530W	Wide	F451W3540W	White
write =	F451W5130W	Wide	F451W5140W	vviile

3000 K 🔍	Beam Angle	4000 K ♀	Body Color
F451B3530W	Wide	F451B3540W	Dlook
F451B5130W	Wide	F451B5140W	Black
	F451B3530W	F451B3530W Wide	F451B3530W Wide F451B3540W

Sira P 6090 Pendant Linear Continuous Linear light with 60 mm light emitting width

Sira P 6090



Pendant Linear



CODE:	F453
Light source	LED
Power (W/m)	30
luminous flux (lm/m)	4000
Color Rendering(Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

*Customized body colors and other color temperatures (CCTs) are available upon request



Supply Voltage: 220-240 Vac,50Hz


Driver:

DALI|Dimmable Version Available upon request

Recommended Applications:


Residential | Office | Shop

Architect: Shift Process & Practice 2019

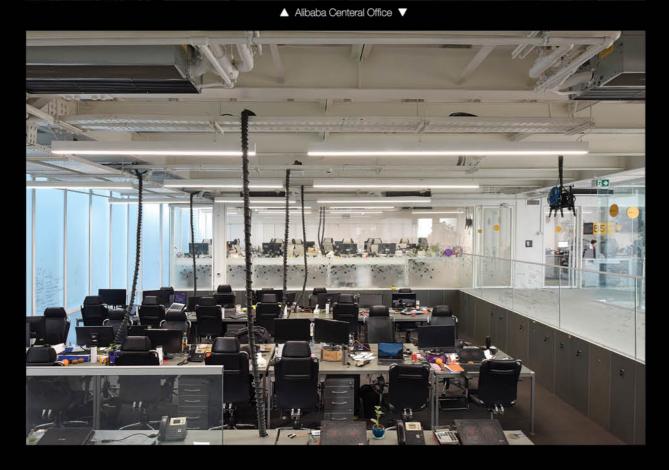


Sira P 6090

Light distributions



Accessories

Optional



Trimless Cable Base Order code: 2453224110

Optional



Solid Aluminium Cover Order code: White: 2451215106 Black: 2451115106

Order code table

Body Color	3000 K ♥	Beam Angle	4000 K ♀	Body Color
White	F451W3530W	Wide	F451W3540W	White
vville =	F451W5130W	Wide	F451W5140W	vviille

3000 K 🔍	Beam Angle	4000 K 🔍	Body Color
F451B3530W	Wide	F451B3540W	Dlook
F451B5130W	Wide	F451B5140W	Black
	F451B3530W	F451B3530W Wide	F451B3530W Wide F451B3540W


Recessed Linear



Sira R 6090





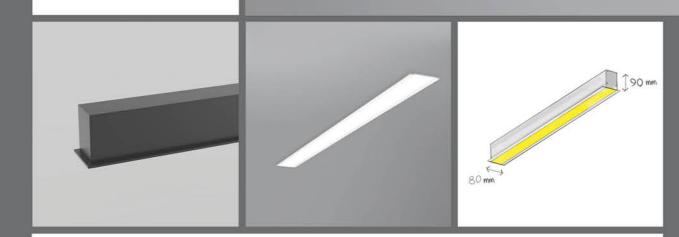

CODE	F452
Light source	LED
Power (W/m)	30
luminous flux (lm/m)	4000
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

IP 70 mm

Supply Voltage: 220-240 Vac,50Hz

Driver:


DALI|Dimmable Version Available upon request

Recommended Applications:
Residential | Office | Shop

*Customized body colors and other color temperatures (CCTs) are available upon request

Continuous Linear light with 60 mm light emitting width

Light distributions



Accessories

Optional




Solid Aluminium Cover Order code:

White: 2451215106 Black: 2451115106

Order code table

01001	oodo tabio			
Body Color	3000 K ♀	Beam Angle	4000 K ●	Body Color
White	F452W3530W	Wide	F452W3540W	White
vviille	F452W5130W	Wide	F452W5140W	vvriite

3000 K 🔍	Beam Angle	4000 K 🔍	Body Color
F452B3530W	Wide	F452B3540W	Black
F452B5130W	Wide	F452B5140W	Black
	F452B3530W	F452B3530W Wide	F452B3530W Wide F452B3540W

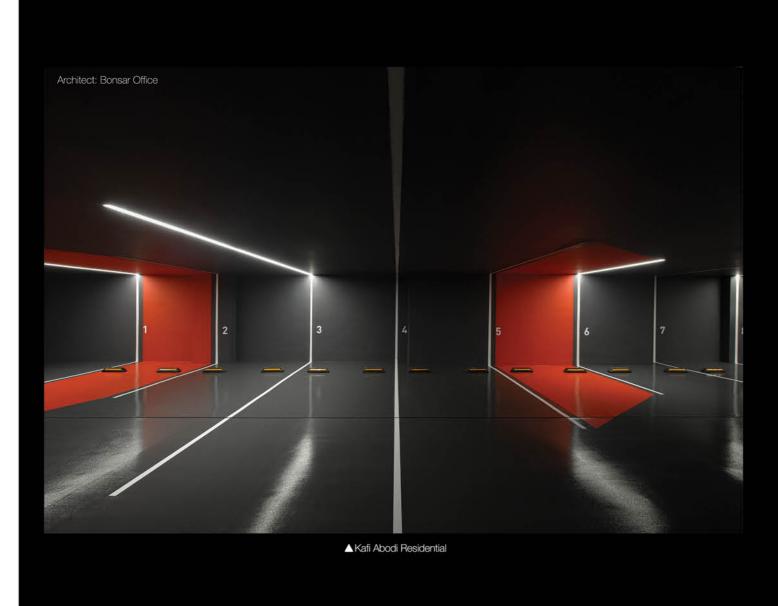

16/


Recessed Linear




Sira R 6040





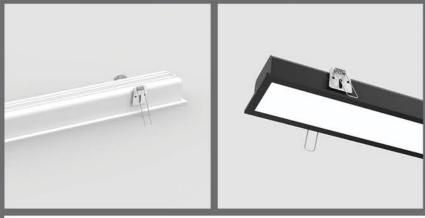



CODE:	F403
Light source	LED
Power (W/m)	30
luminous flux (lm/m)	4000
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	White Black

Supply Voltage: 220-240 Vac,50Hz

Driver:


DALI|Dimmable Version Available upon request

Recommended Applications:
Residential | Office | Shop

*Customized body colors and other color temperatures (CCTs) are available upon request

Continuous Linear light with 60 mm light emitting width

Light distributions







Accessories

Optional



Solid Aluminium Cover


Order code: White: 2451215106 Black: 2451115106

Order code table

Body Color	3000 K ♀	Beam Angle	4000 K ♀	Body Color
White	F451W3530W	Wide	F451W3540W	White
vville =	F451W5130W	Wide	F451W5140W	vviille

Body Color	3000 K 🔍	Beam Angle	4000 K ●	Body Color
Blook	F451B3530W	Wide	F451B3540W	Plack
Black	F451B5130W	Wide	F451B5140W	Black

Outdoor Lighting

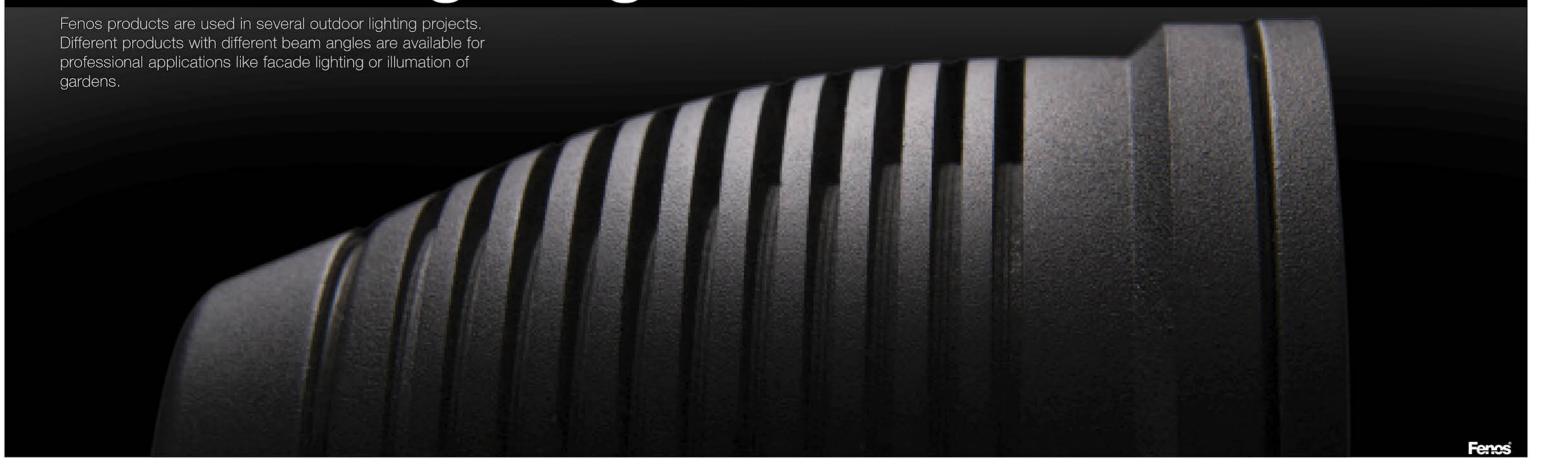

Silva Midi

Floor Surface











CODE	F920
Light source	LED
Power (W)	13
luminous flux (lm)	1400
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	Silver



Supply Voltage: 220-240 Vac,50Hz


Driver:

DALI|Dimmable Version Available upon request

Recommended Applications:
Residential | Office | Shop

Facade Lighting


*Customized body colors and other color temperatures (CCTs) are available upon request

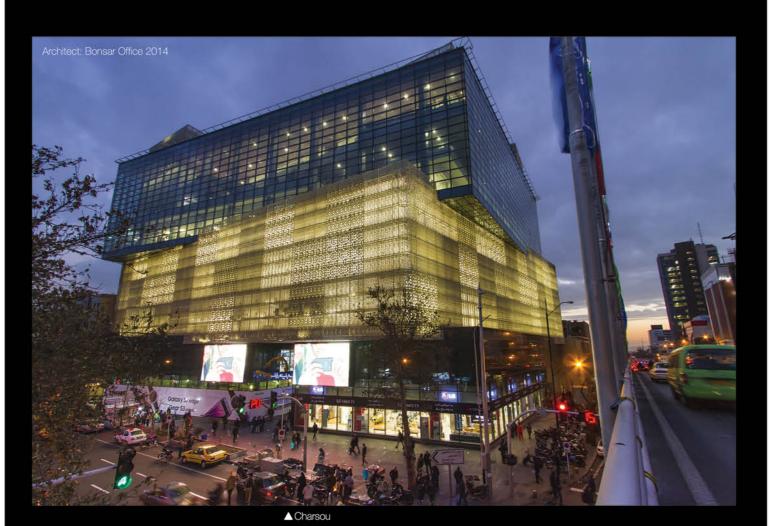



Silva Midi

Light distributions

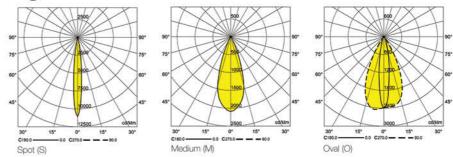

Accessories

Order code table -


3000 K 🍳	Beam Angle	4000 K 🔍	Body Color
F920S1330S	Spot	F920S1340S	
F920S1330M	Medium	F920S1340M	Silver
F920S1330O	Oval	F920S1340O	
	F920S1330S F920S1330M	F920S1330S Spot F920S1330M Medium	F920S1330S Spot F920S1340S F920S1330M Medium F920S1340M

Silva Maxi

Floor Surface





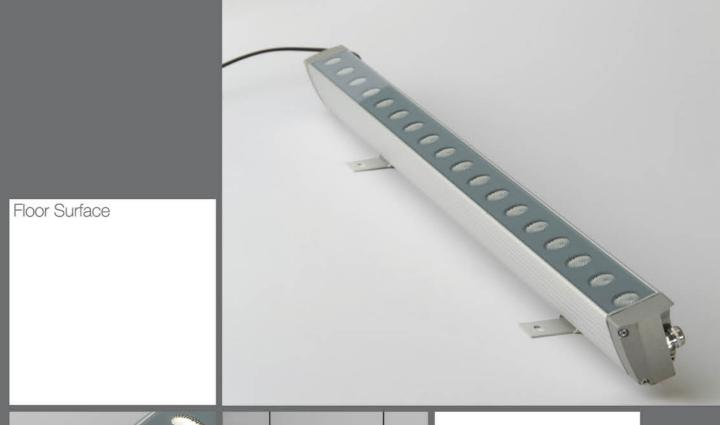

CODE	F925
Light source	LED
Power (W)	40
luminous flux (lm)	3240
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000*
Body Color	Silver

*Customized body colors and other color temperatures (CCTs) are available upon request



Supply Voltage: 220-240 Vac,50Hz

Driver:

DALI|Dimmable Version Available upon request

Recommended Applications:


Residential | Office | Shop Facade Lighting

Professional outdoor compact linear light with different light distributions



Silva Maxi

Light distributions

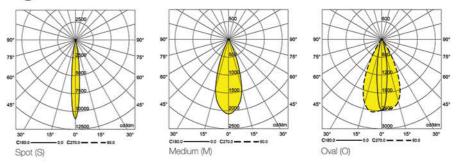

Accessories

Order code table -

Body Color	3000 K 🔍	Beam Angle	4000 K 🔍	Body Color
	F925S4030S	Spot	F925S4040S	
Silver	F925S4030M	Medium	F925S4040M	Silver
	F925S4030O	Oval	F925S40400	

^{*}Customized body color and other light distribution are also available upon request

Vaswa Midi

Exterior Projector



Compact and powerful Small projector for facade and garden lighting

Vaswa Midi





Exterior Projector





CODE	F900
Light source	LED
Power (W)	8
luminous flux (Im)	800
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000
Body Color	Gray

IP 65

Supply Voltage: 220-240 Vac,50Hz


Recommended Applications:
Residential | Office | Shop

Facade Lighting | Garden

*Customized body colors and other color temperatures (CCTs) are available upon request






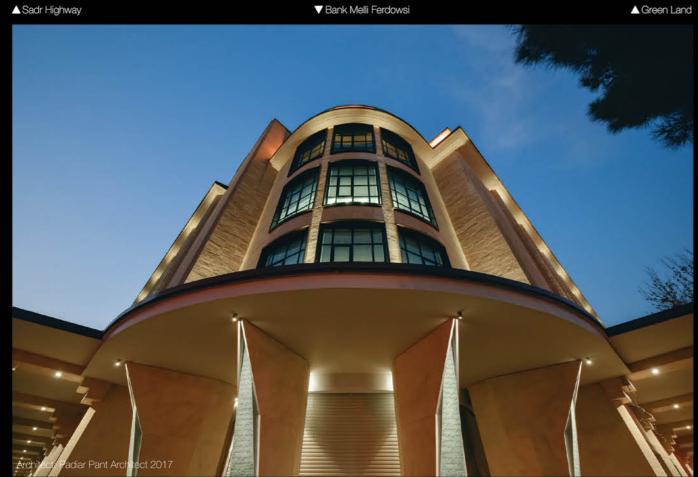

Vaswa Midi

Light distributions



Accessories

Order code table

Body Color	3000 K 💡	Beam Angle	4000 K 🔮	Body Color
0	F901G830S	Spot	F901G840S	Crov
Gray	F901G830M	Medium	F901G840M	Gray

Vaswa Maxi

Exterior Projector



For facade and landscape For delightful outdoor atmosphere

Vaswa Maxi



Exterior Projector





CODE	F905
Light source	LED
Power (W)	12
luminous flux (Im)	1320
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000
Body Color	Gray


IP 65

Supply Voltage: 220-240 Vac,50Hz

Recommended Applications:
Residential | Office | Shop
Fcade Lighting | Garden Lighting


*Customized body colors and other color temperatures (CCTs) are available upon request



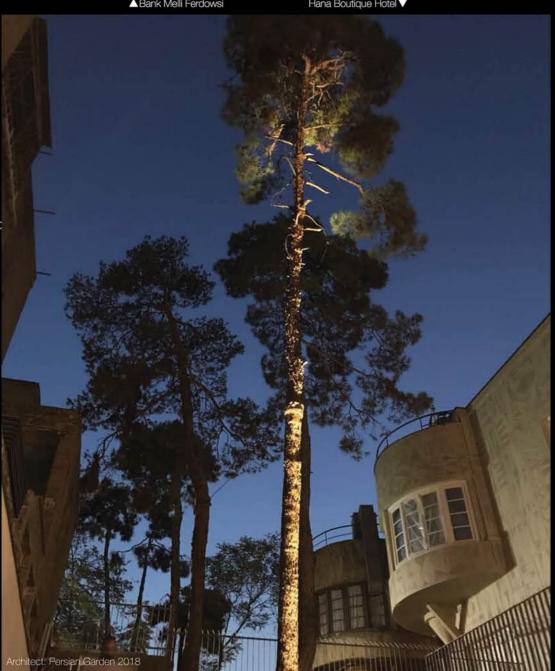



Light distributions



Accessories

Order code table -

Body Color	3000 K 🔮	Beam Angle	4000 K 💡	Body Color
Gray	F905B1230XS	Extreme Spot	F905B1240XS	Gray



Wall Mounted












CODE	F640
Light source	LED
Power (W)	2x6
luminous flux (lm)	2x600
Color Rendering (Ra)	>80
Color Temperature (K)	3000 4000
Body Color	White Black Gray
7.6	

IP 65

Supply Voltage: 220-240 Vac,50Hz Recommended Applications: Residential | Facade Lighting

^{*}Customized body colors and other color temperatures (CCTs) are available upon request

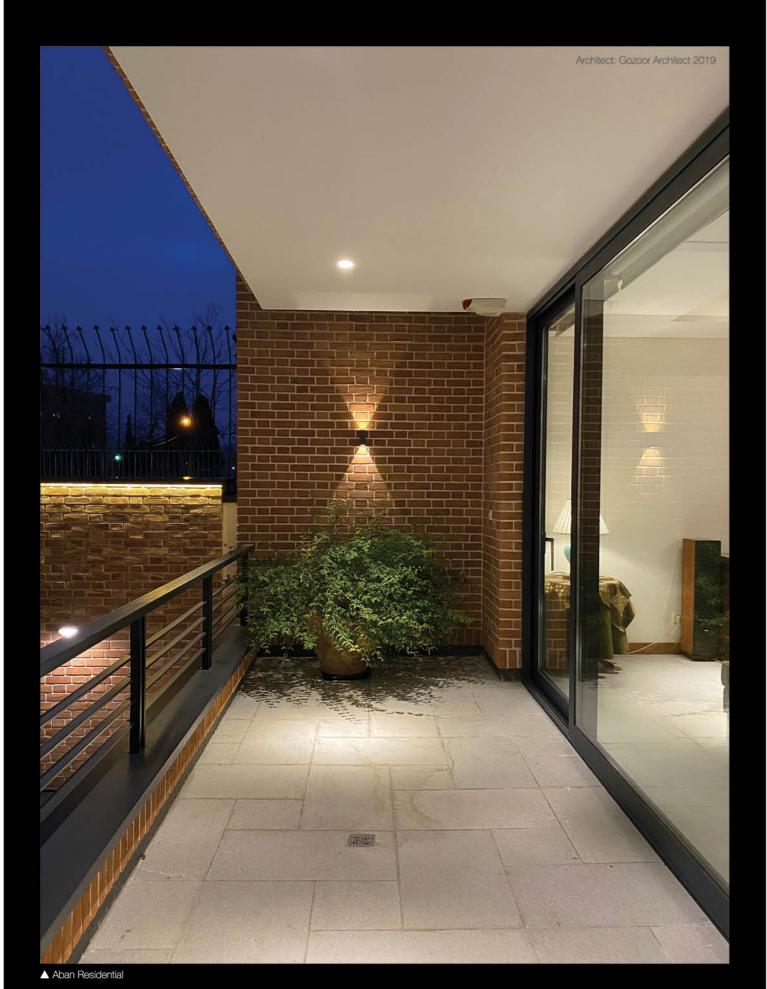

Torso

Light distributions

Accessories

Optional



<u>Double</u> LED GU10 Lamp Order code: 10020101

Order code for GU10 version* -

Body Color	Body Code	
White	F940WG	
Black	F940BG	
Gray	F940GG	

Lamp is not included*





Accessories

Accessories -

Surface Track 3Phase

Body Color	Order Code	Meter	Order Code	Body Color
	25106	1	25102	
\\/hito	25206	2	25202	Dlook
White -	25306	3	25302	Black
-	25406	4	25402	



End Cap

Body Color	Orde	r Code	Body Color
White	555112171	555112172	Black



End Feed(earth right)

Body Color	Orde	r Code	Body Color
White	555112011	555112012	Black



End Feed(earth left)

Body Color	Order Code		Body Color
White	555112021	555112022	Black



X Coupler(with feeding option)

Body Color	Orde	r Code	Body Color
White	555112161	555112162	Black

Accessories —



L Coupler(with feeding option earth outside)

Body Color	Orde	r Code	Body Color
White	555112091	555112092	Black



L Coupler(with feeding option earth inside)

Body Color	Order Code		Body Color
White	555112101	555112102	Black



I Coupler(with feeding option)

Body Color		r Code	Body Color
White	555112081	555112082	Black



Flex Coupler (30 to 330 degree with feeding option)

Body Color	Orde	r Code	Body Colo
White	555112111	555112112	Black



T Coupler(with feeding option earth inside right)

Body Color	Orde	r Code	Body Color
White	555112121	555112122	Black

Accessories



T Coupler (with feeding option earth inside left)

Body Color	Orde	r Code	Body Color
White	555112131	555112132	Black



T Coupler(with feeding option earth outside right)

Body Color	Orde	r Code	Body Color
White	555112141	555112142	Black



T Coupler(with feeding option earth outside left)

Body Color	Orde	r Code	Body Color
White	555112151	555112152	Black



Krab


Body Color	Order C	Code	Body Color
White	FE10W6036	FE10B6036	Black




Beno LED Strips


Order Code	Power(W/m)	Voltage(V)	CCT(K)
F80014306033	14	24 VDC	3000
F80014406033	14	24 VDC	4000
F80010306033	10	24 VDC	3000
F80010406033	10	24 VDC	4000


Earth Run Layout Help

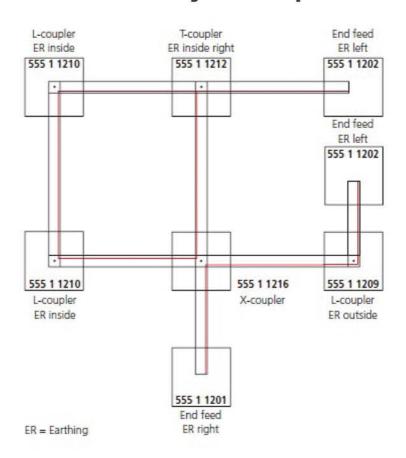

Surface Track 3Phase Mechanical Load








3~ track wiring diagram

a) Connection to AC 230V (220 - 240V) maximum load: 3.600 W (3.500 - 3.800 W) Total load can spread on any circuit

fuse power supply cable power supply cable 1 x 16 A min. 3 x 1.5 mm² min. 3 x 2.5 mm²




Fenos Product Coding Guide



Alephabetic index


Darklans	14	
Eyden L	80	
Eyden Mini	76	
Eyren Micro	18	
Felka Maxi	124	
Felka Midi	118	
Felka Mini	110	
Filde Micro	22	
Filde Mini	26	
Fitran Q	90	
LED Strip	194	
Nian	60	
Pelka	130	
Rico	30	
Roni WW	94	
Roni	98	
Sibron CF-TR	34	
Sibron C Maxi	50	
Sibron C Midi	46	
Sibron C Micro	38	
Sibron C Mini	42	


Sibron Q Maxi	72	
Sibron Q Midi	68	
Sibron Q Mini	64	
Silva Maxi	176	
Silva Midi	172	
Sira OL	150	
Sira P 6090	158	
Sira R 1616	146	
Sira R 6040	166	
Sira R 6090	162	
Sira S 1616	142	
Sira S 6090	154	
Tiran C Mini	54	
Tiran S	84	
Torso	188	
Valman	102	
Vaswa Maxi	184	
Vaswa Midi	180	
Vera	134	
Vera Twin	138	

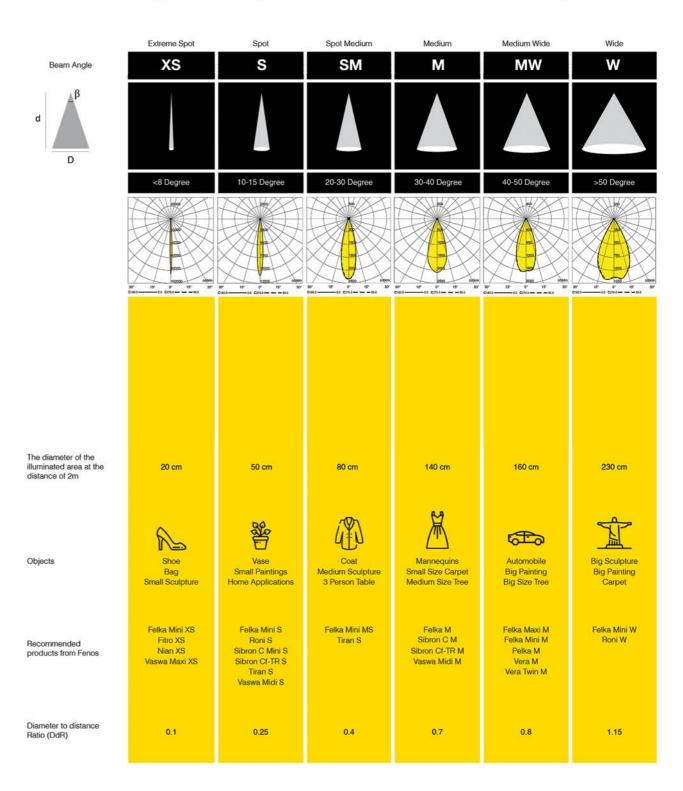

Installation Instruction

Trimless Lights

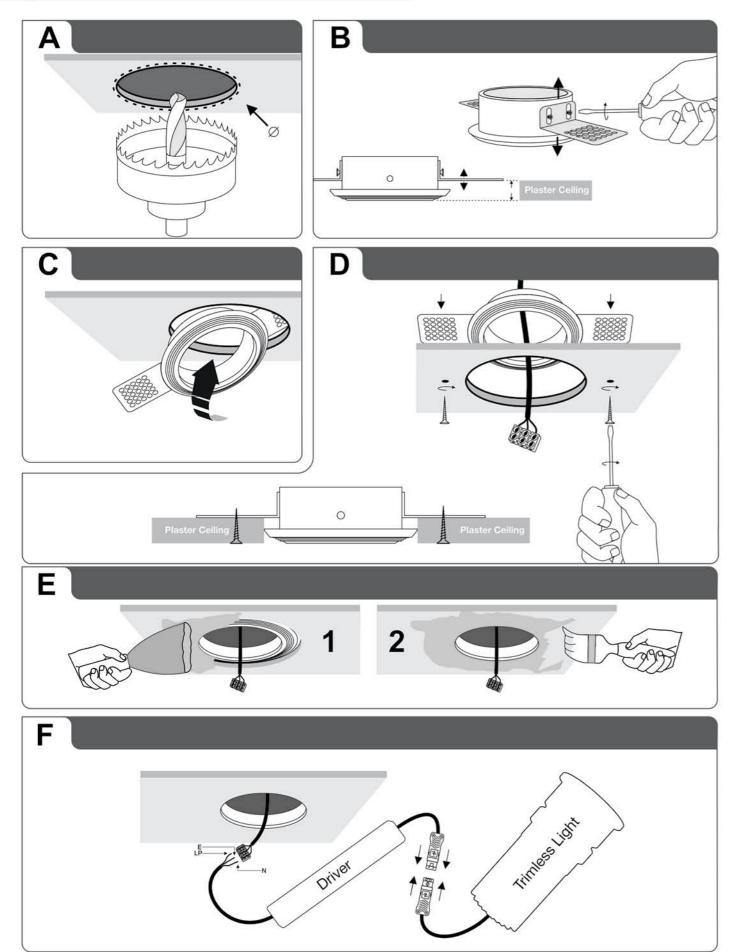

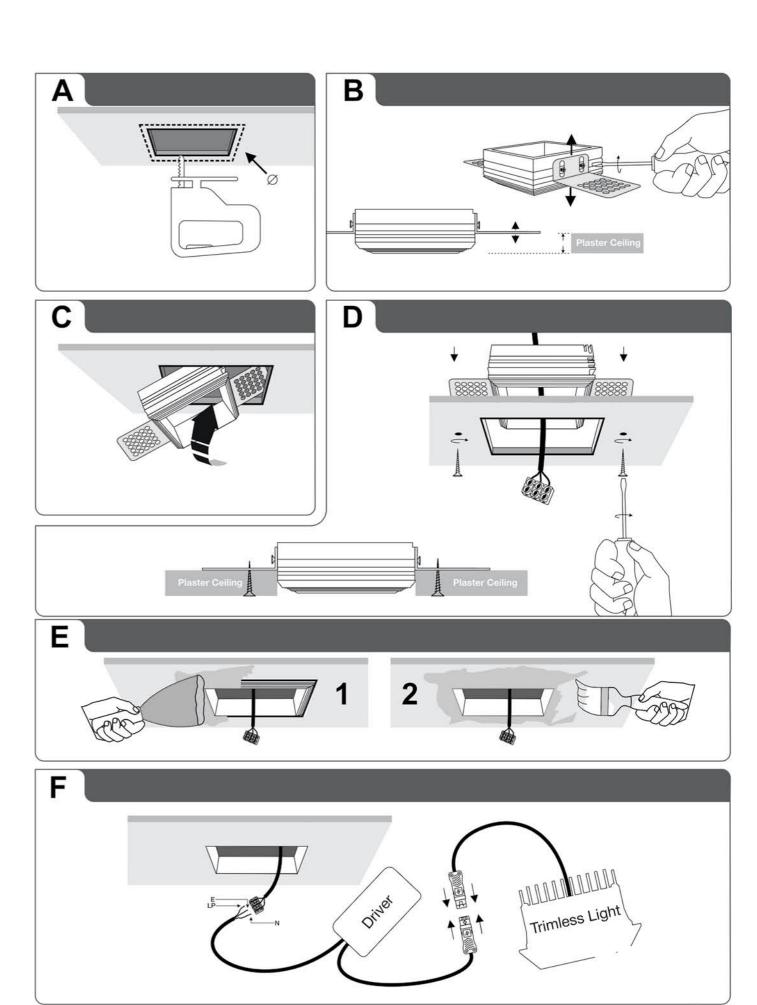

202

